

office@guzhenlightingfair.com

Light source/luminescent Angle

With the rapid development of the LED industry, high-efficiency linear lighting products have fully met the main lighting needs, and the lighting is uniform and enhances the visual sense.The high luminous efficiency of LED linear lighting also saves costs.
LED linear lighting can have a higher lifespan than other types of lamps, save maintenance and replacement costs, can have a service life of 5 to 10 years, and energy costs will be greatly reduced.

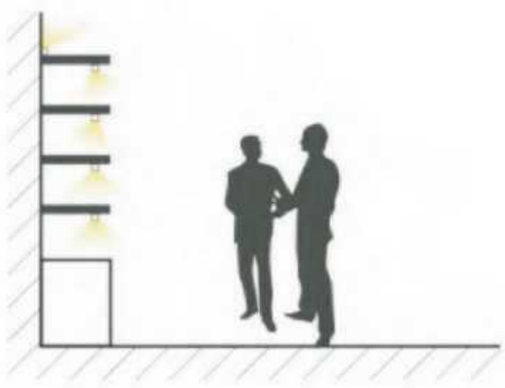


Shelf lighting

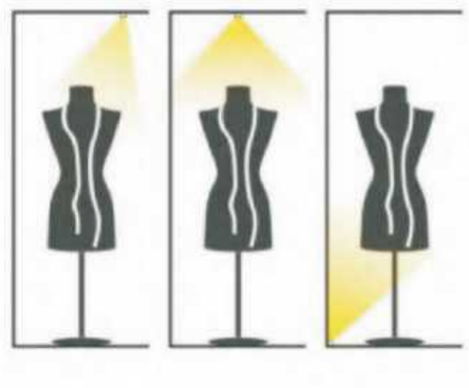


wardrobe lighting



Exhibition lighting

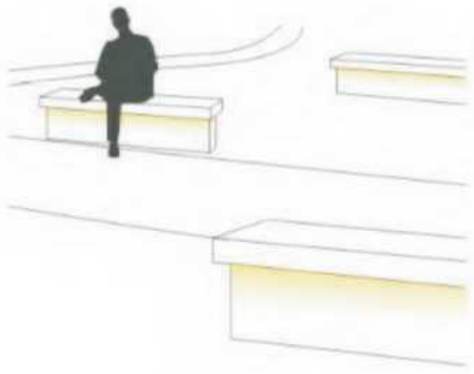


bench lighting

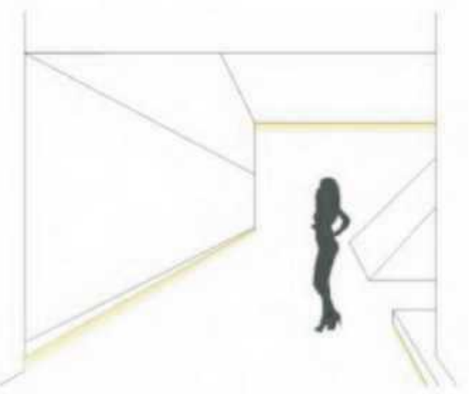

Showroom lighting



Stair lighting

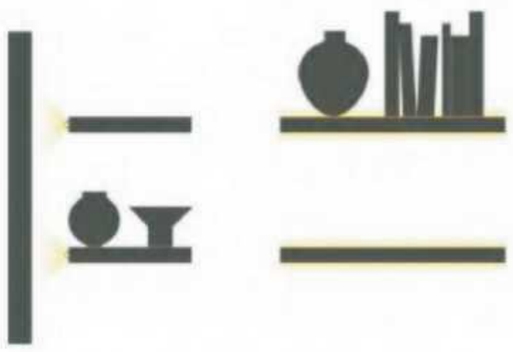


Clapboard back wall lighting




Display case top lighting




Display case bottom lighting



Use fine reflections for spot-free and seamless products



hide the lamps




for curved structured lighting

Wiring Application


Monochrome wiring diagram



Two color &RGB wiring diagram

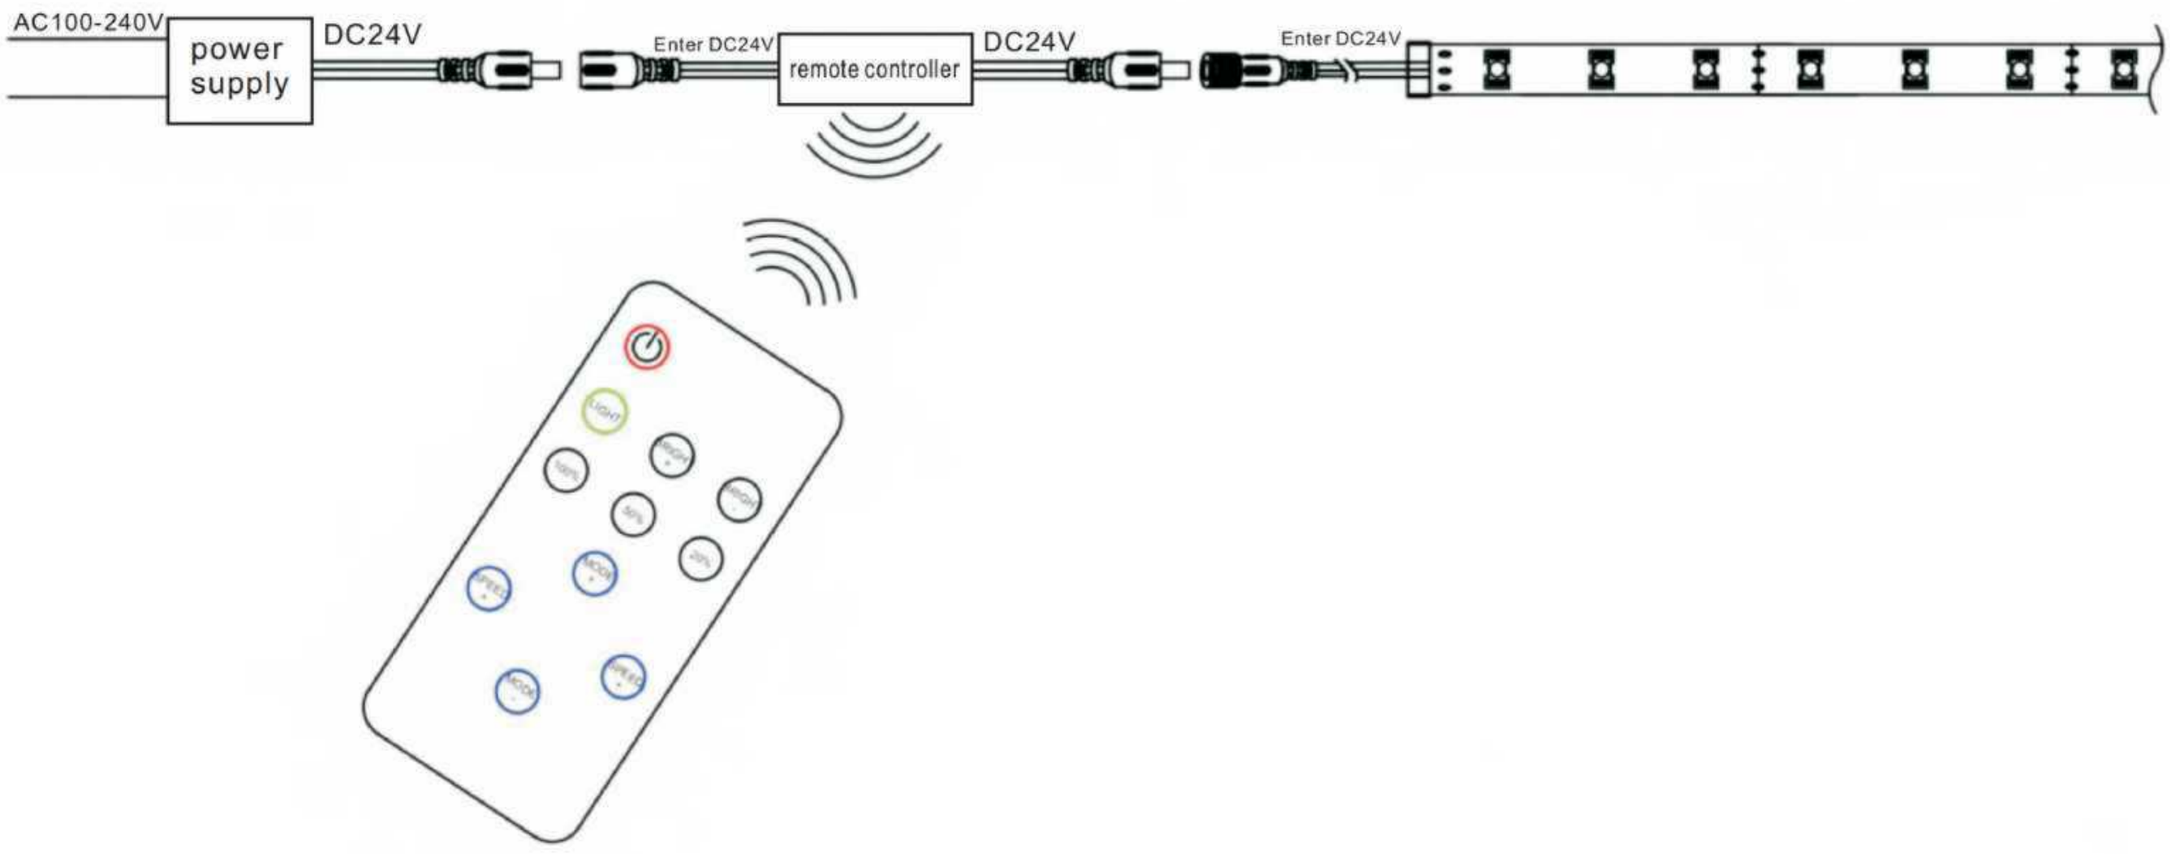


RGBW wiring diagram

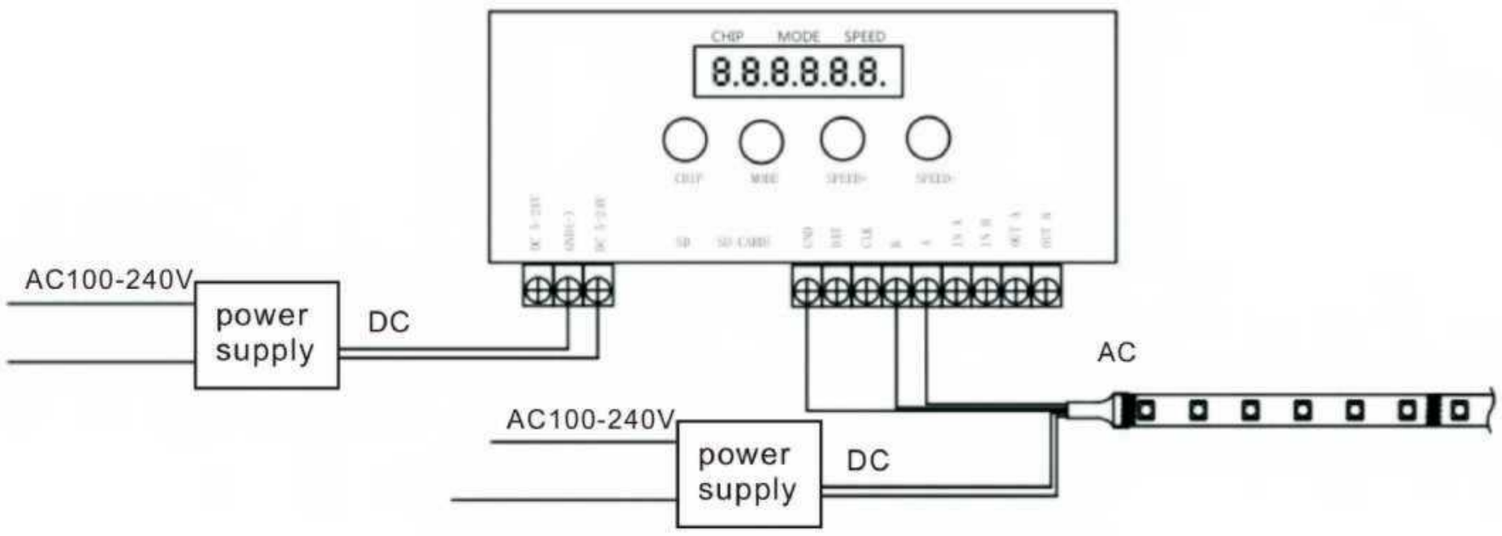

LED Strip Structure

The LED lamp belt is composed of FPC, LED, stick resistance, IC, waterproof silicone, connecting terminal and other materials.

Lamp belt type

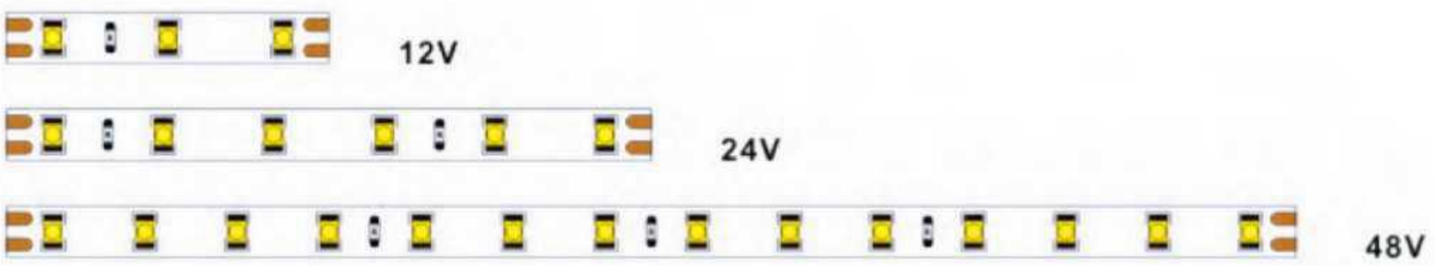


Lamp bead

CRI > 80 | CRI > 90 | CRI > 95

2000K 2400K 2700K 3000K 3500K 4000K 5000K 5700K 6500K

Double layer copper flexible circuit board

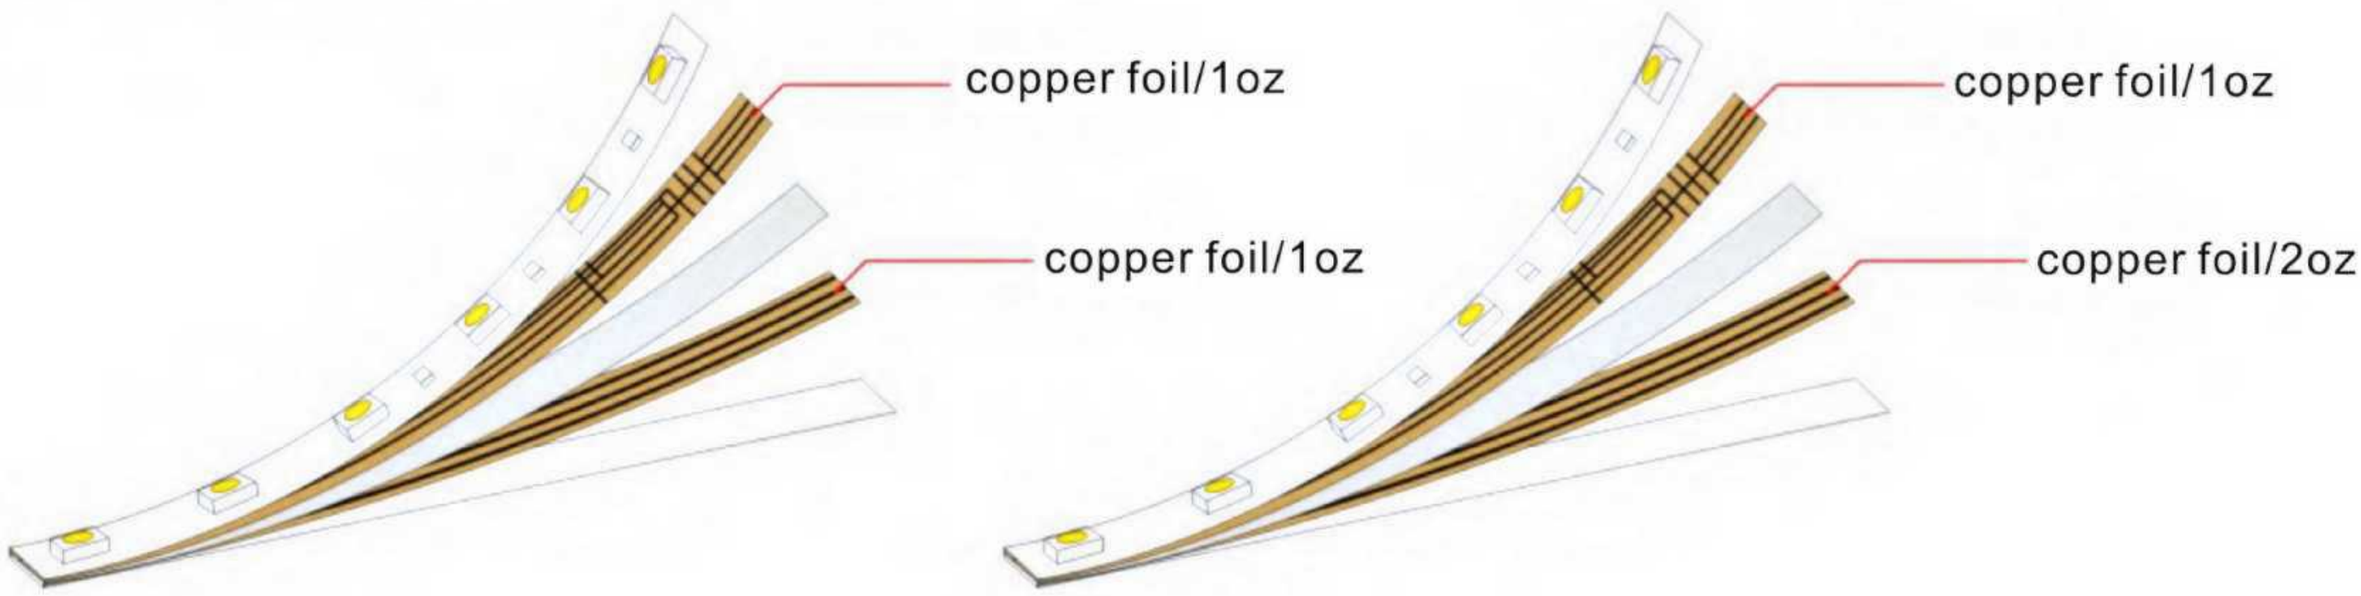

3M double-sided adhesive



office@guzhenlightingfair.com

Constant pressure monochrome series

Using 12/24V human safety low pressure design, FPC double panel with 2 oz thick copper foil inside, effectively stop pressure drop, and ensure the heat dissipation effect of LED chip, effectively extend the service life, can be widely used in a variety of indoor space lighting.

SMD 2025 / SMD 2835 / SMD 5730




office@guzhenlightingfair.com

12V-2835-120P-5mm

Color soft,not dazzing

No spot,no stroboscopic

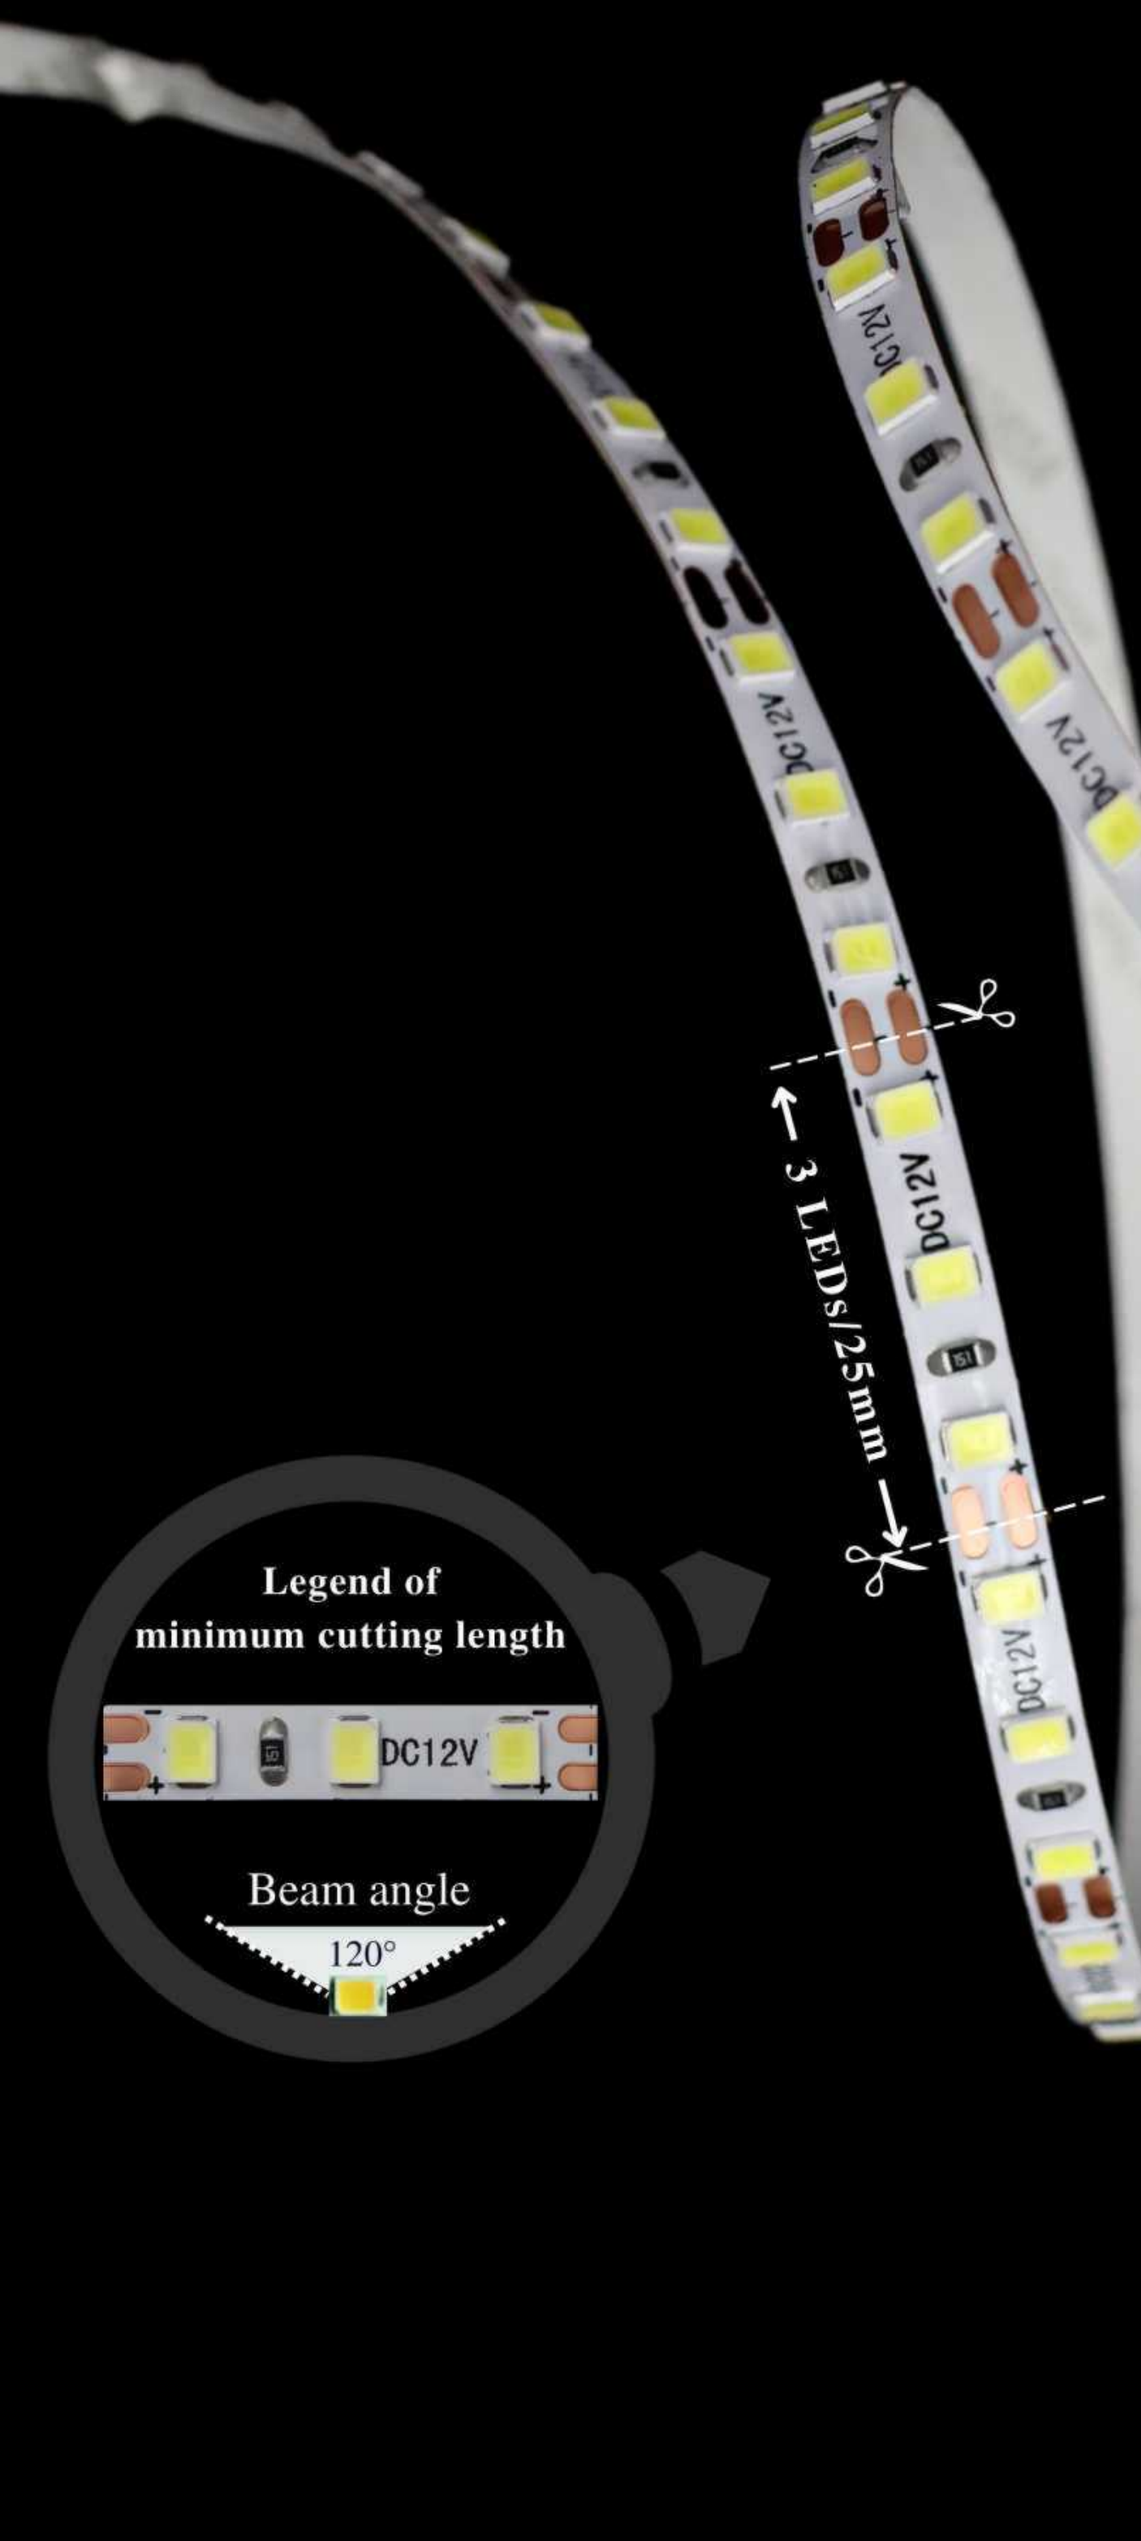

Legend Parameters

Input Voltage: DC 12V

Power: 10W/m

Width: 5mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/35T

CCT: 6500K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K


CE F RoHS

office@guzhenlightingfair.com

12V-2835-120P-5mm-PLUS

Color soft,no stroboscopic

High CRI,more realistic colors

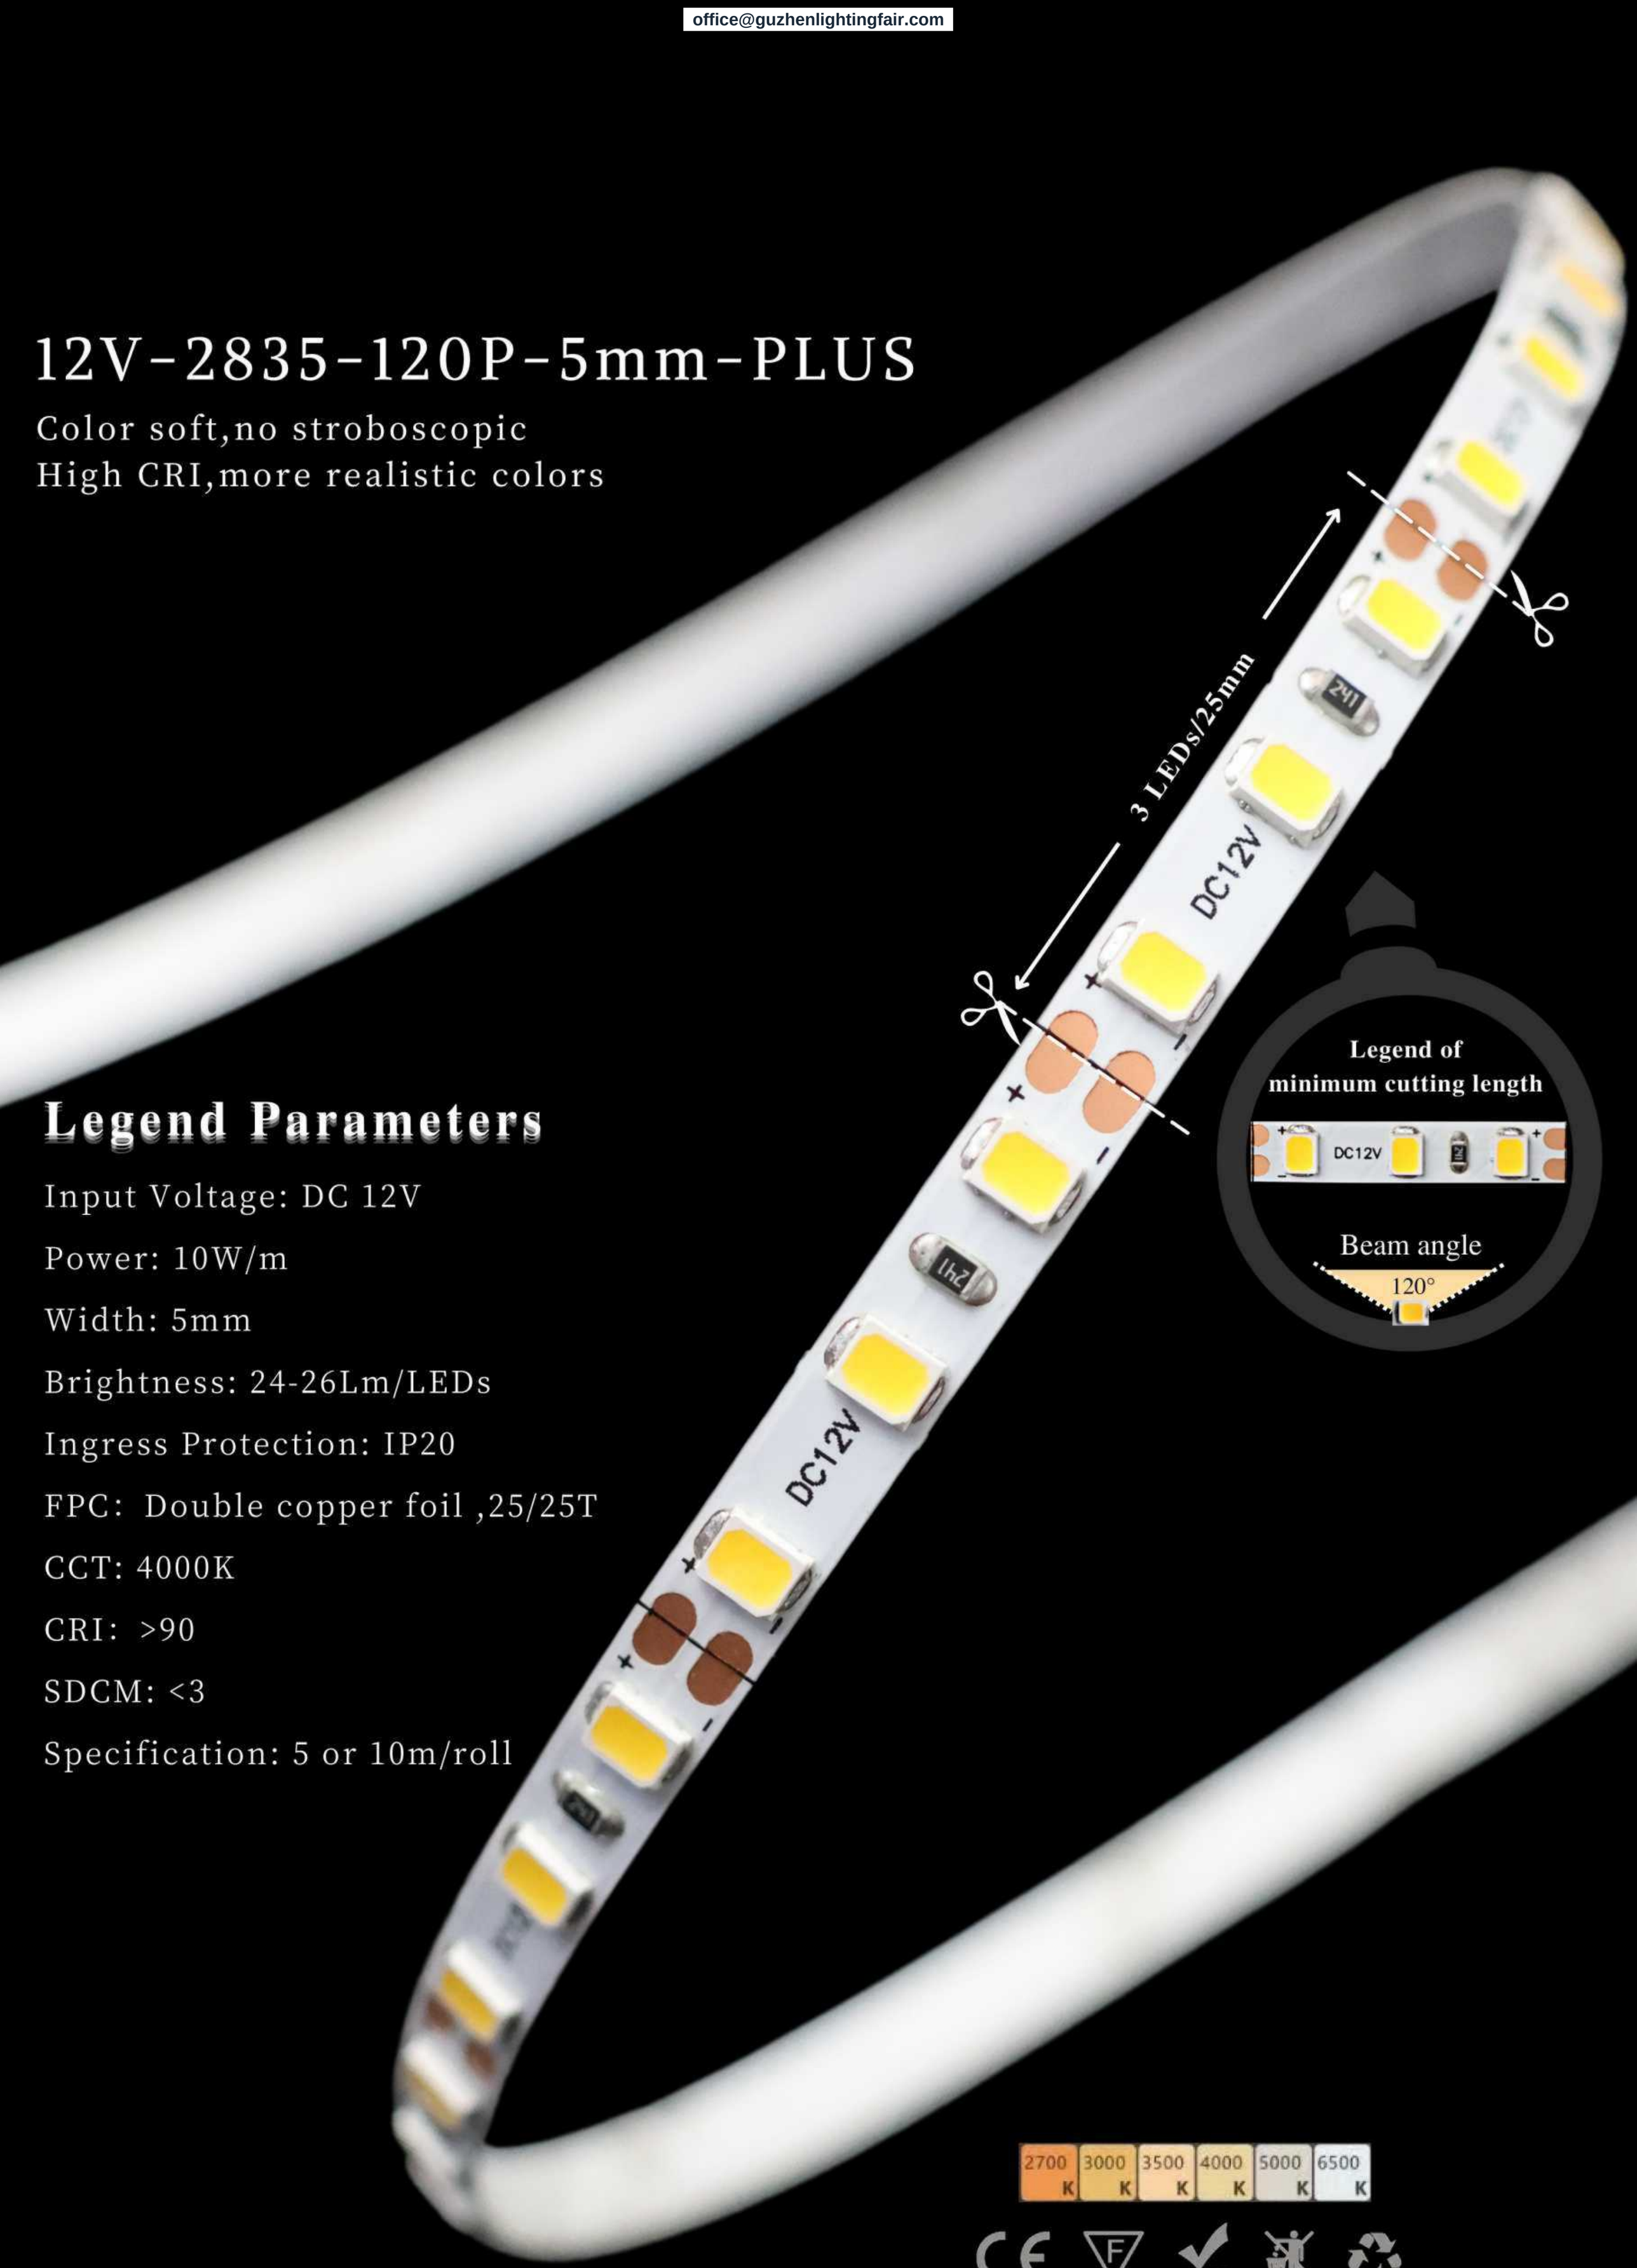

Legend Parameters

Input Voltage: DC 12V

Power: 10W/m

Width: 5mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 4000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-120P-5mm

Color soft,not dazzing

No spot,no stroboscopic

Legend Parameters

Input Voltage: DC 24V

Power: 10W/m

Width: 5mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/35T

CCT: 4000K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



Beam angle

120°


2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2025-280P-8mm

High density,no spot
Uniform emission,no glare

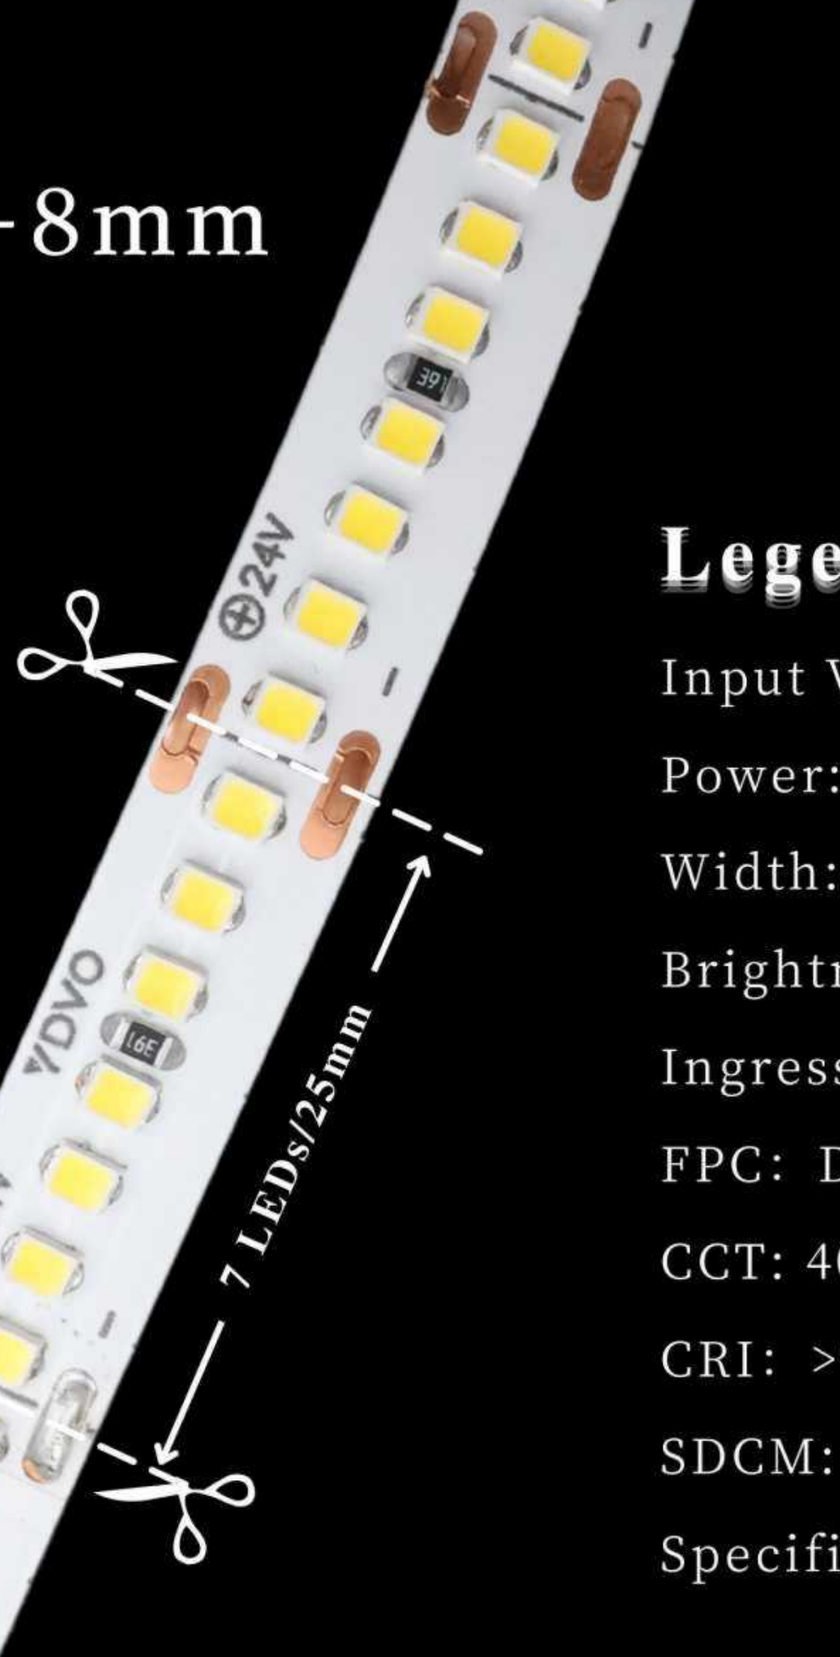



Legend Parameters

Input Voltage: DC 24V
Power: 10W/m
Width: 8mm
Brightness: 24-26Lm/LEDs
Ingress Protection: IP20
FPC: Double copper foil ,25/35T
CCT: 4000K
CRI: >90
SDCM: <3
Specification: 5 or 10m/roll


2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2025-280P-8mm-PLUS

High density,uniform emission
Higher light efficiency,longer working life

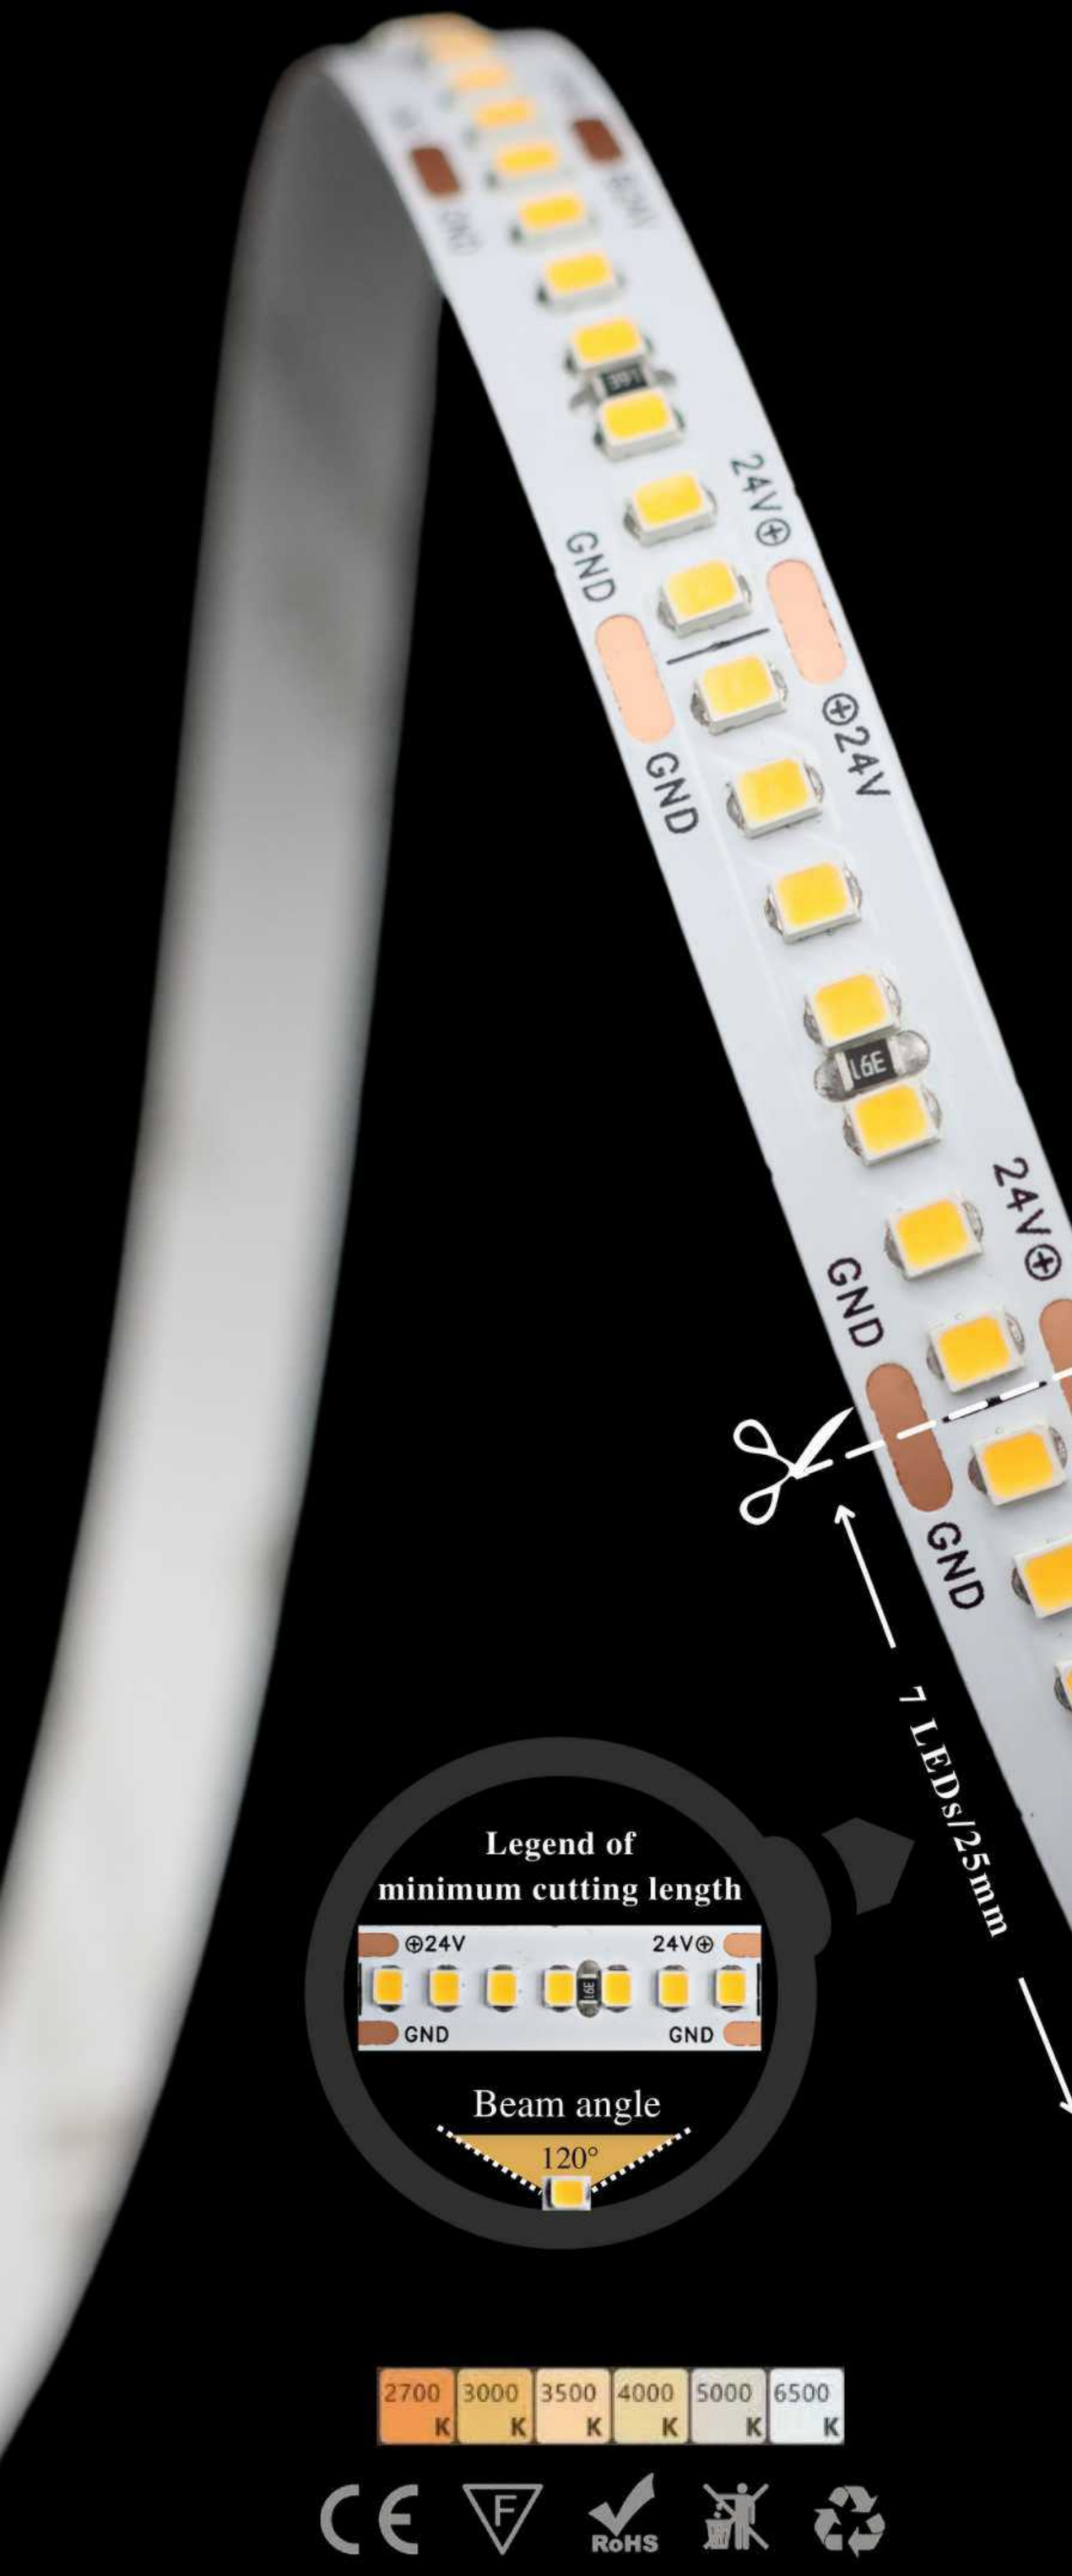

Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/70T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

24V-2025-280P-8mm-SCOB

Silicone glue filling,high density
Shadowless,arbitrary cutting

Sectional view



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 10mm*4.5mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP65


FPC: Double copper foil ,25/70T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

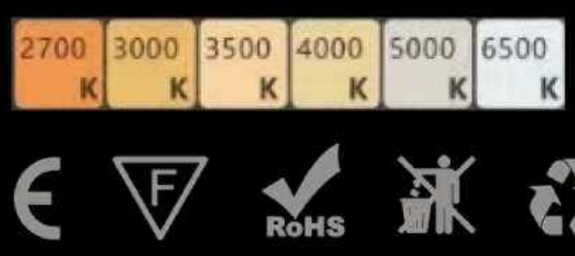

office@guzhenlightingfair.com

12V-2835-120P-8mm

Color soft,not dazzing

No spot,no stroboscopic

Legend Parameters

Input Voltage: DC 12V

Power: 10W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/25T


CCT: 6500K


CRI: >80

SDCM: <3

Specification: 5 or 10m/roll



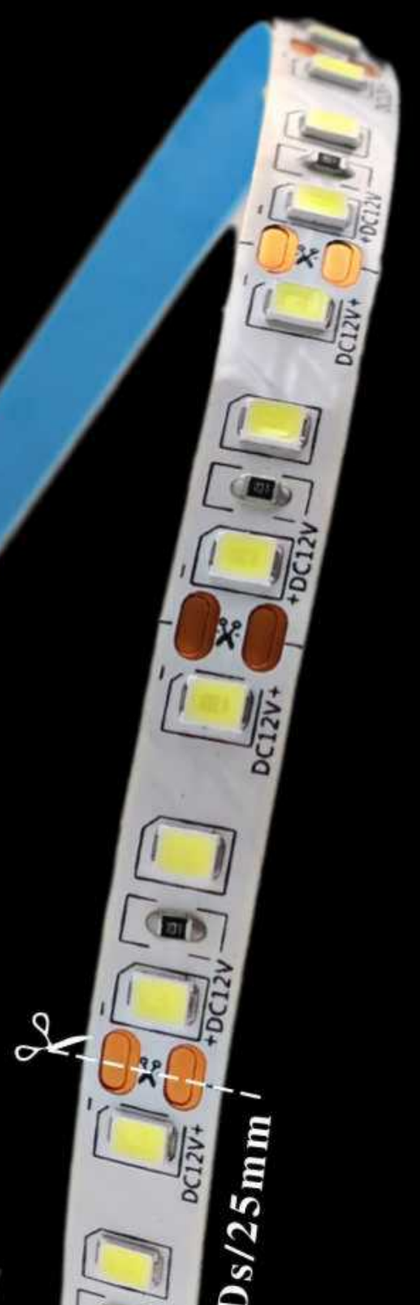

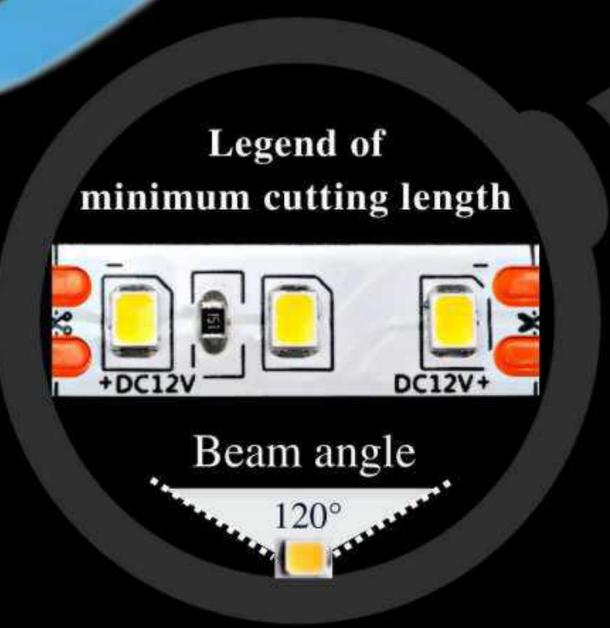

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

12V-2835-120P-8mm-GM

Color soft,not dazzing

Uniform emission,no spot



Legend Parameters

Input Voltage: DC 12V

Power: 10W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

office@guzhenlightingfair.com

24V-2835-120P-8mm-C-5W

Color soft,not dazzing

Uniform emission,no spot



Legend Parameters

Input Voltage: DC 24V

Power: 5W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/50T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 10 or 20 m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-120P-8mm-C

Color soft,not dazzing

Uniform emission,no spot

Legend Parameters

Input Voltage: DC 24V

Power: 10W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/50T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 10m/roll



office@guzhenlightingfair.com

24V-2835-120P-8mm-B

Color soft,uniform emission

Lossless circut,no dark field

Legend Parameters

Input Voltage: DC 24V

Power: 10W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20


FPC: Double copper foil ,25/100T

CCT: 6500K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

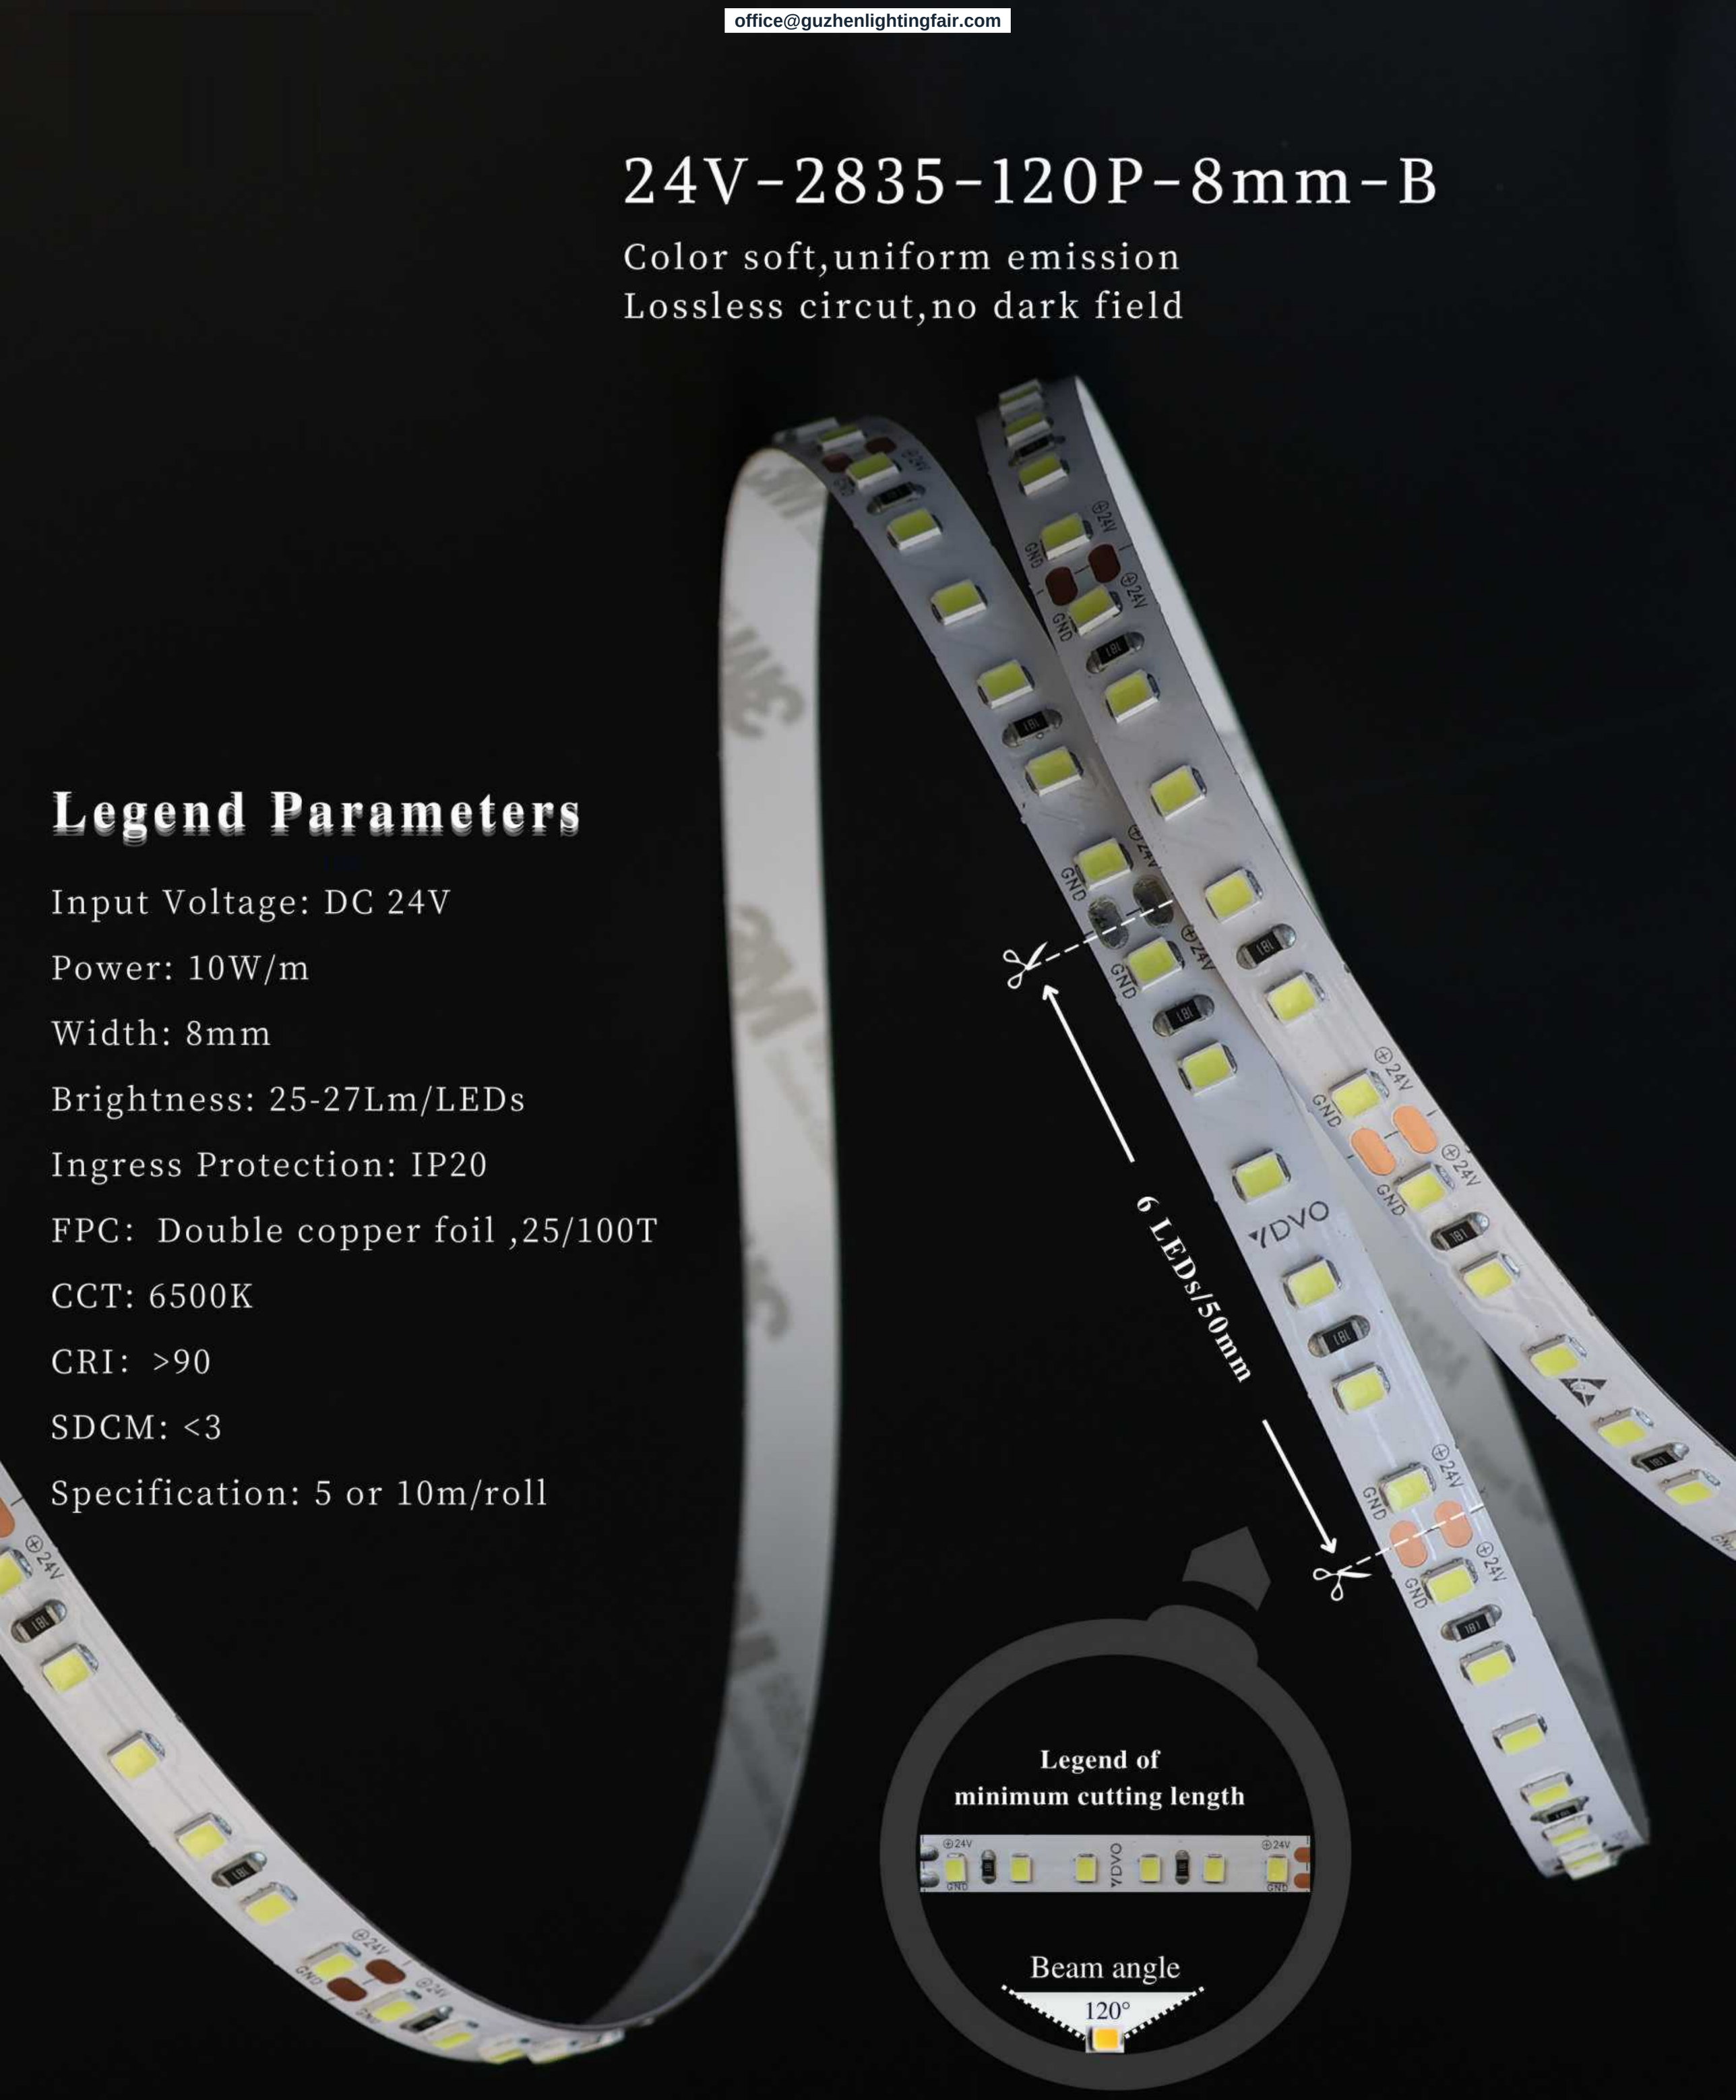

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

office@guzhenlightingfair.com

24V-2835-120P-8mm-PLUS

Lossless circut,no dark field
High light efficiency,long working life

Legend Parameters

Input Voltage: DC 24V

Power: 10W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/105T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll



2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-182P-8mm-PLUS

High density,uniform emission
Higher light efficiency,longer working life



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/70T

CCT: 4000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K


CE F RoHS

office@guzhenlightingfair.com

12V-5730-60P-10mm

Uniform emission,no spot

The lamp strip can be customized

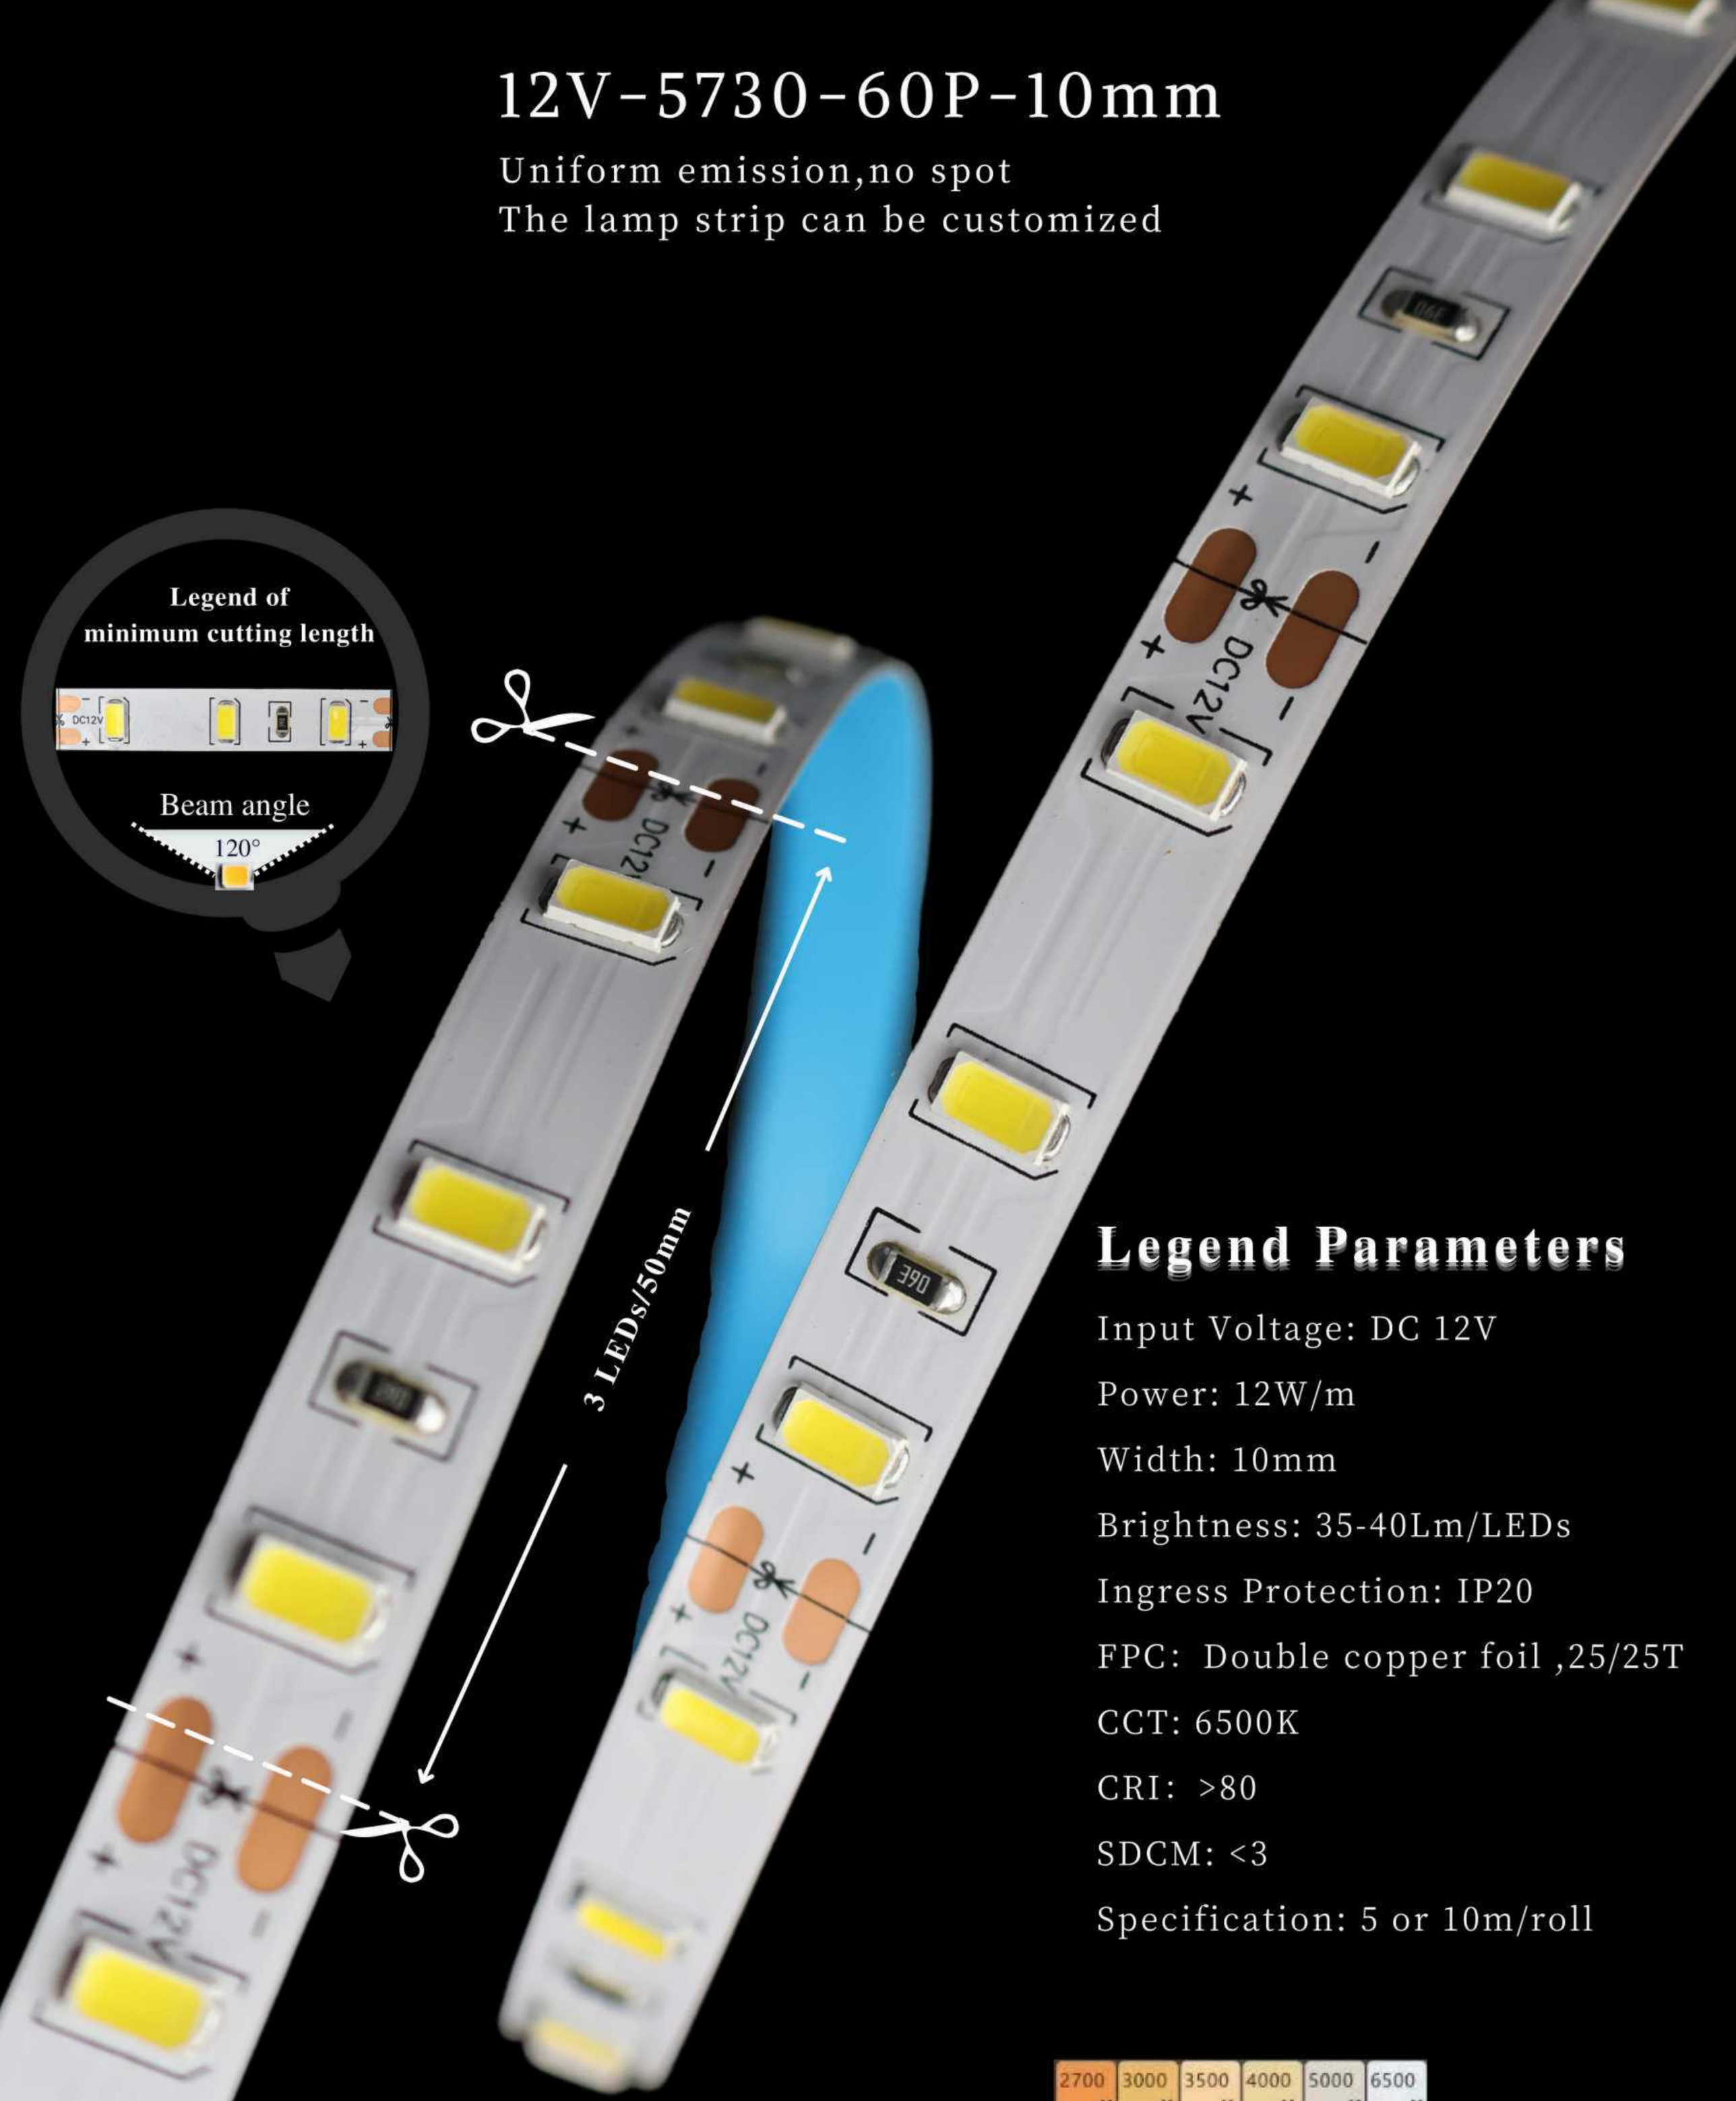

Legend Parameters

Input Voltage: DC 12V

Power: 12W/m

Width: 10mm

Brightness: 35-40Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 6500K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

24V-2835-180P-10mm

High density,no glare
No spot,uniform emission



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 10mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/35T

CCT: 4000K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll


2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K


RoHS

office@guzhenlightingfair.com

12V-2835-240P-10mm

High density,no spot,uniform emission
The lamp strip can be customized.

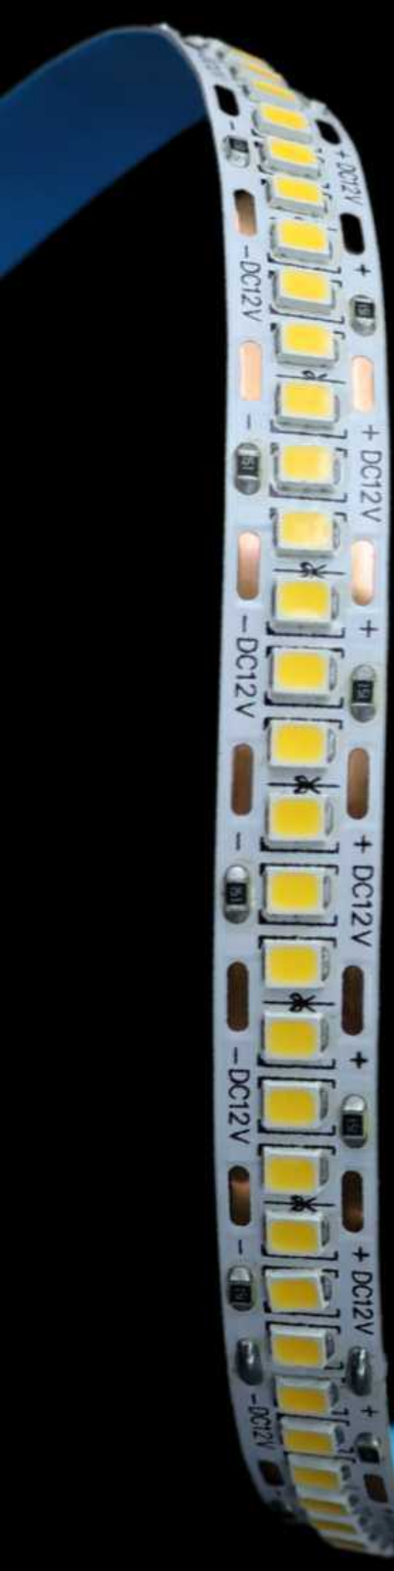

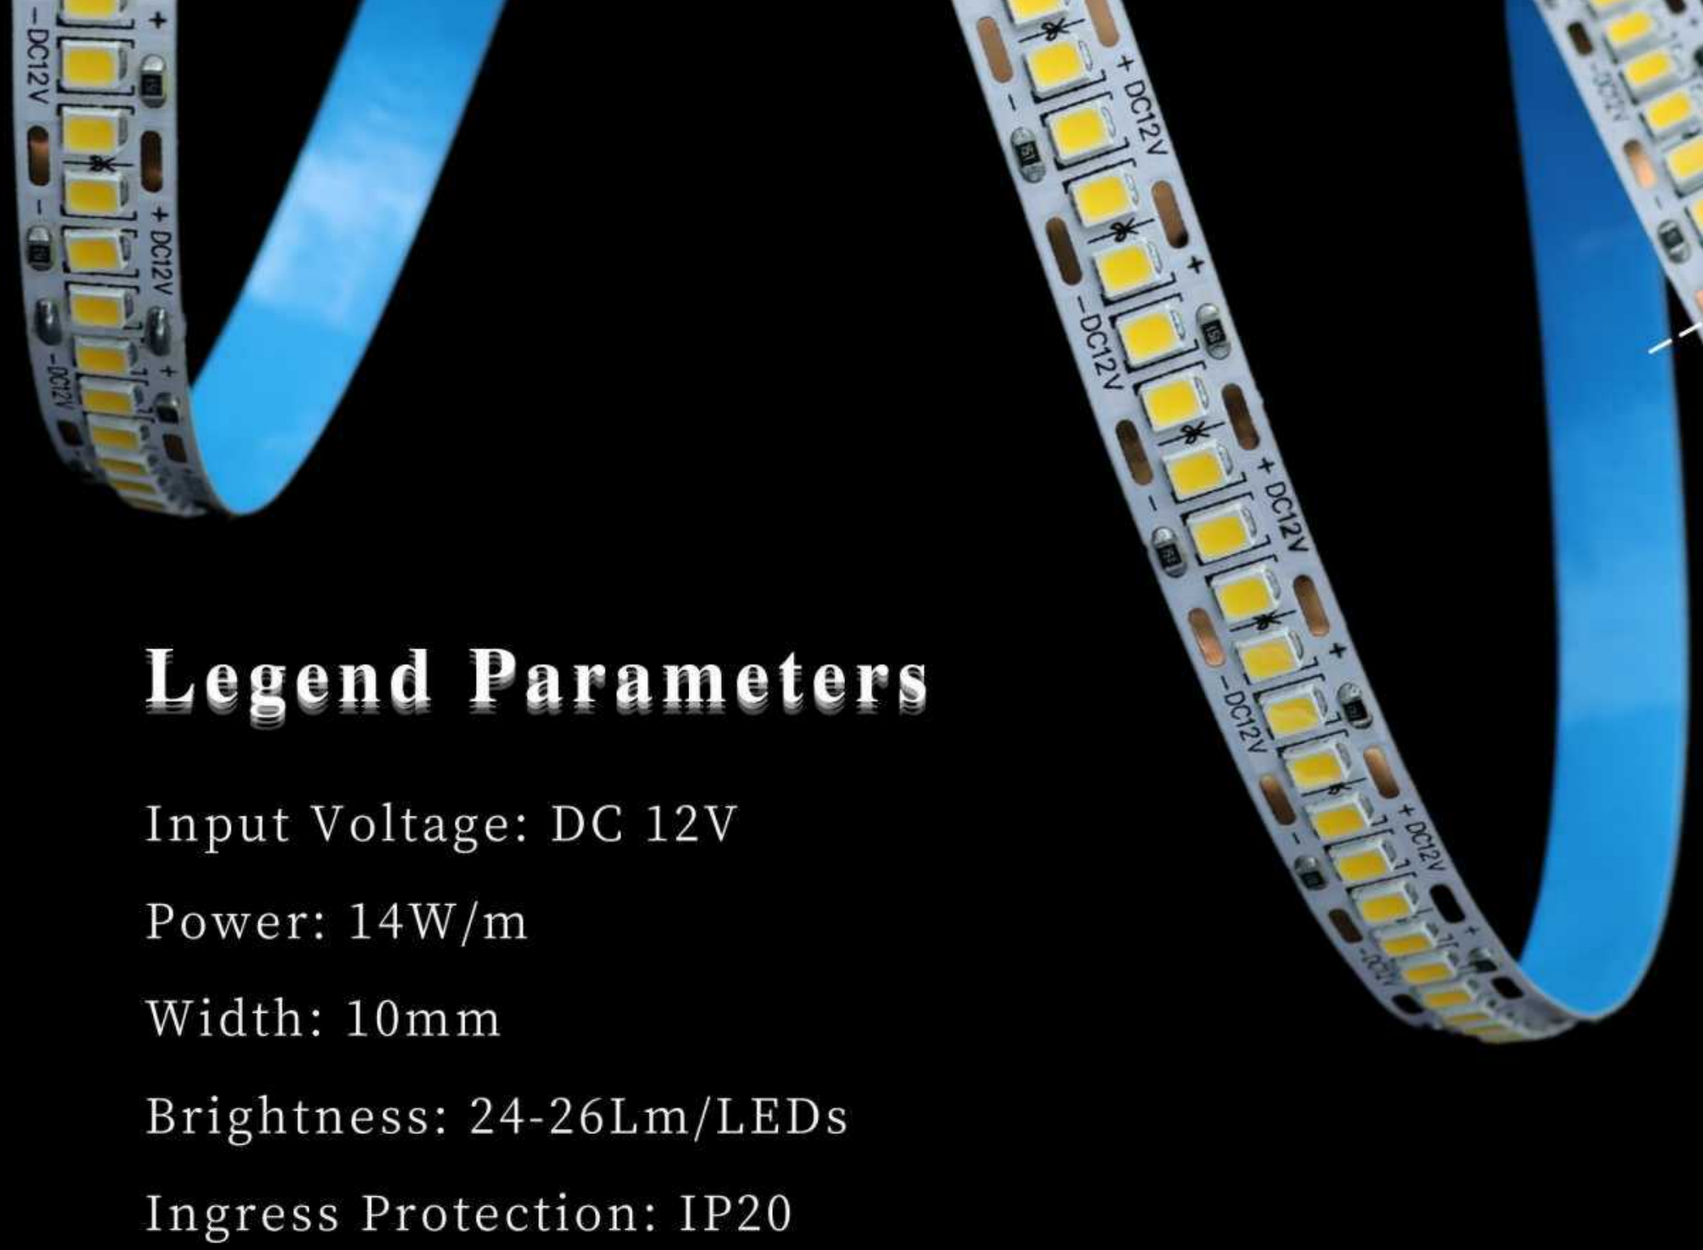



Legend Parameters

Input Voltage: DC 12V

Power: 14W/m

Width: 10mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/50T

CCT: 3000K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll





office@guzhenlightingfair.com

24V-2835-240P-10mm-DR

Double row,high density

Uniform emission,no spot

Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 10mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/50T

CCT: 4000K

CRI: >80

SDCM: <3


Specification: 5 or 10m/roll



office@guzhenlightingfair.com

24V-2835-240P-15mm-DR-PLUS

Double row,high density
High CRI,more realistic colors

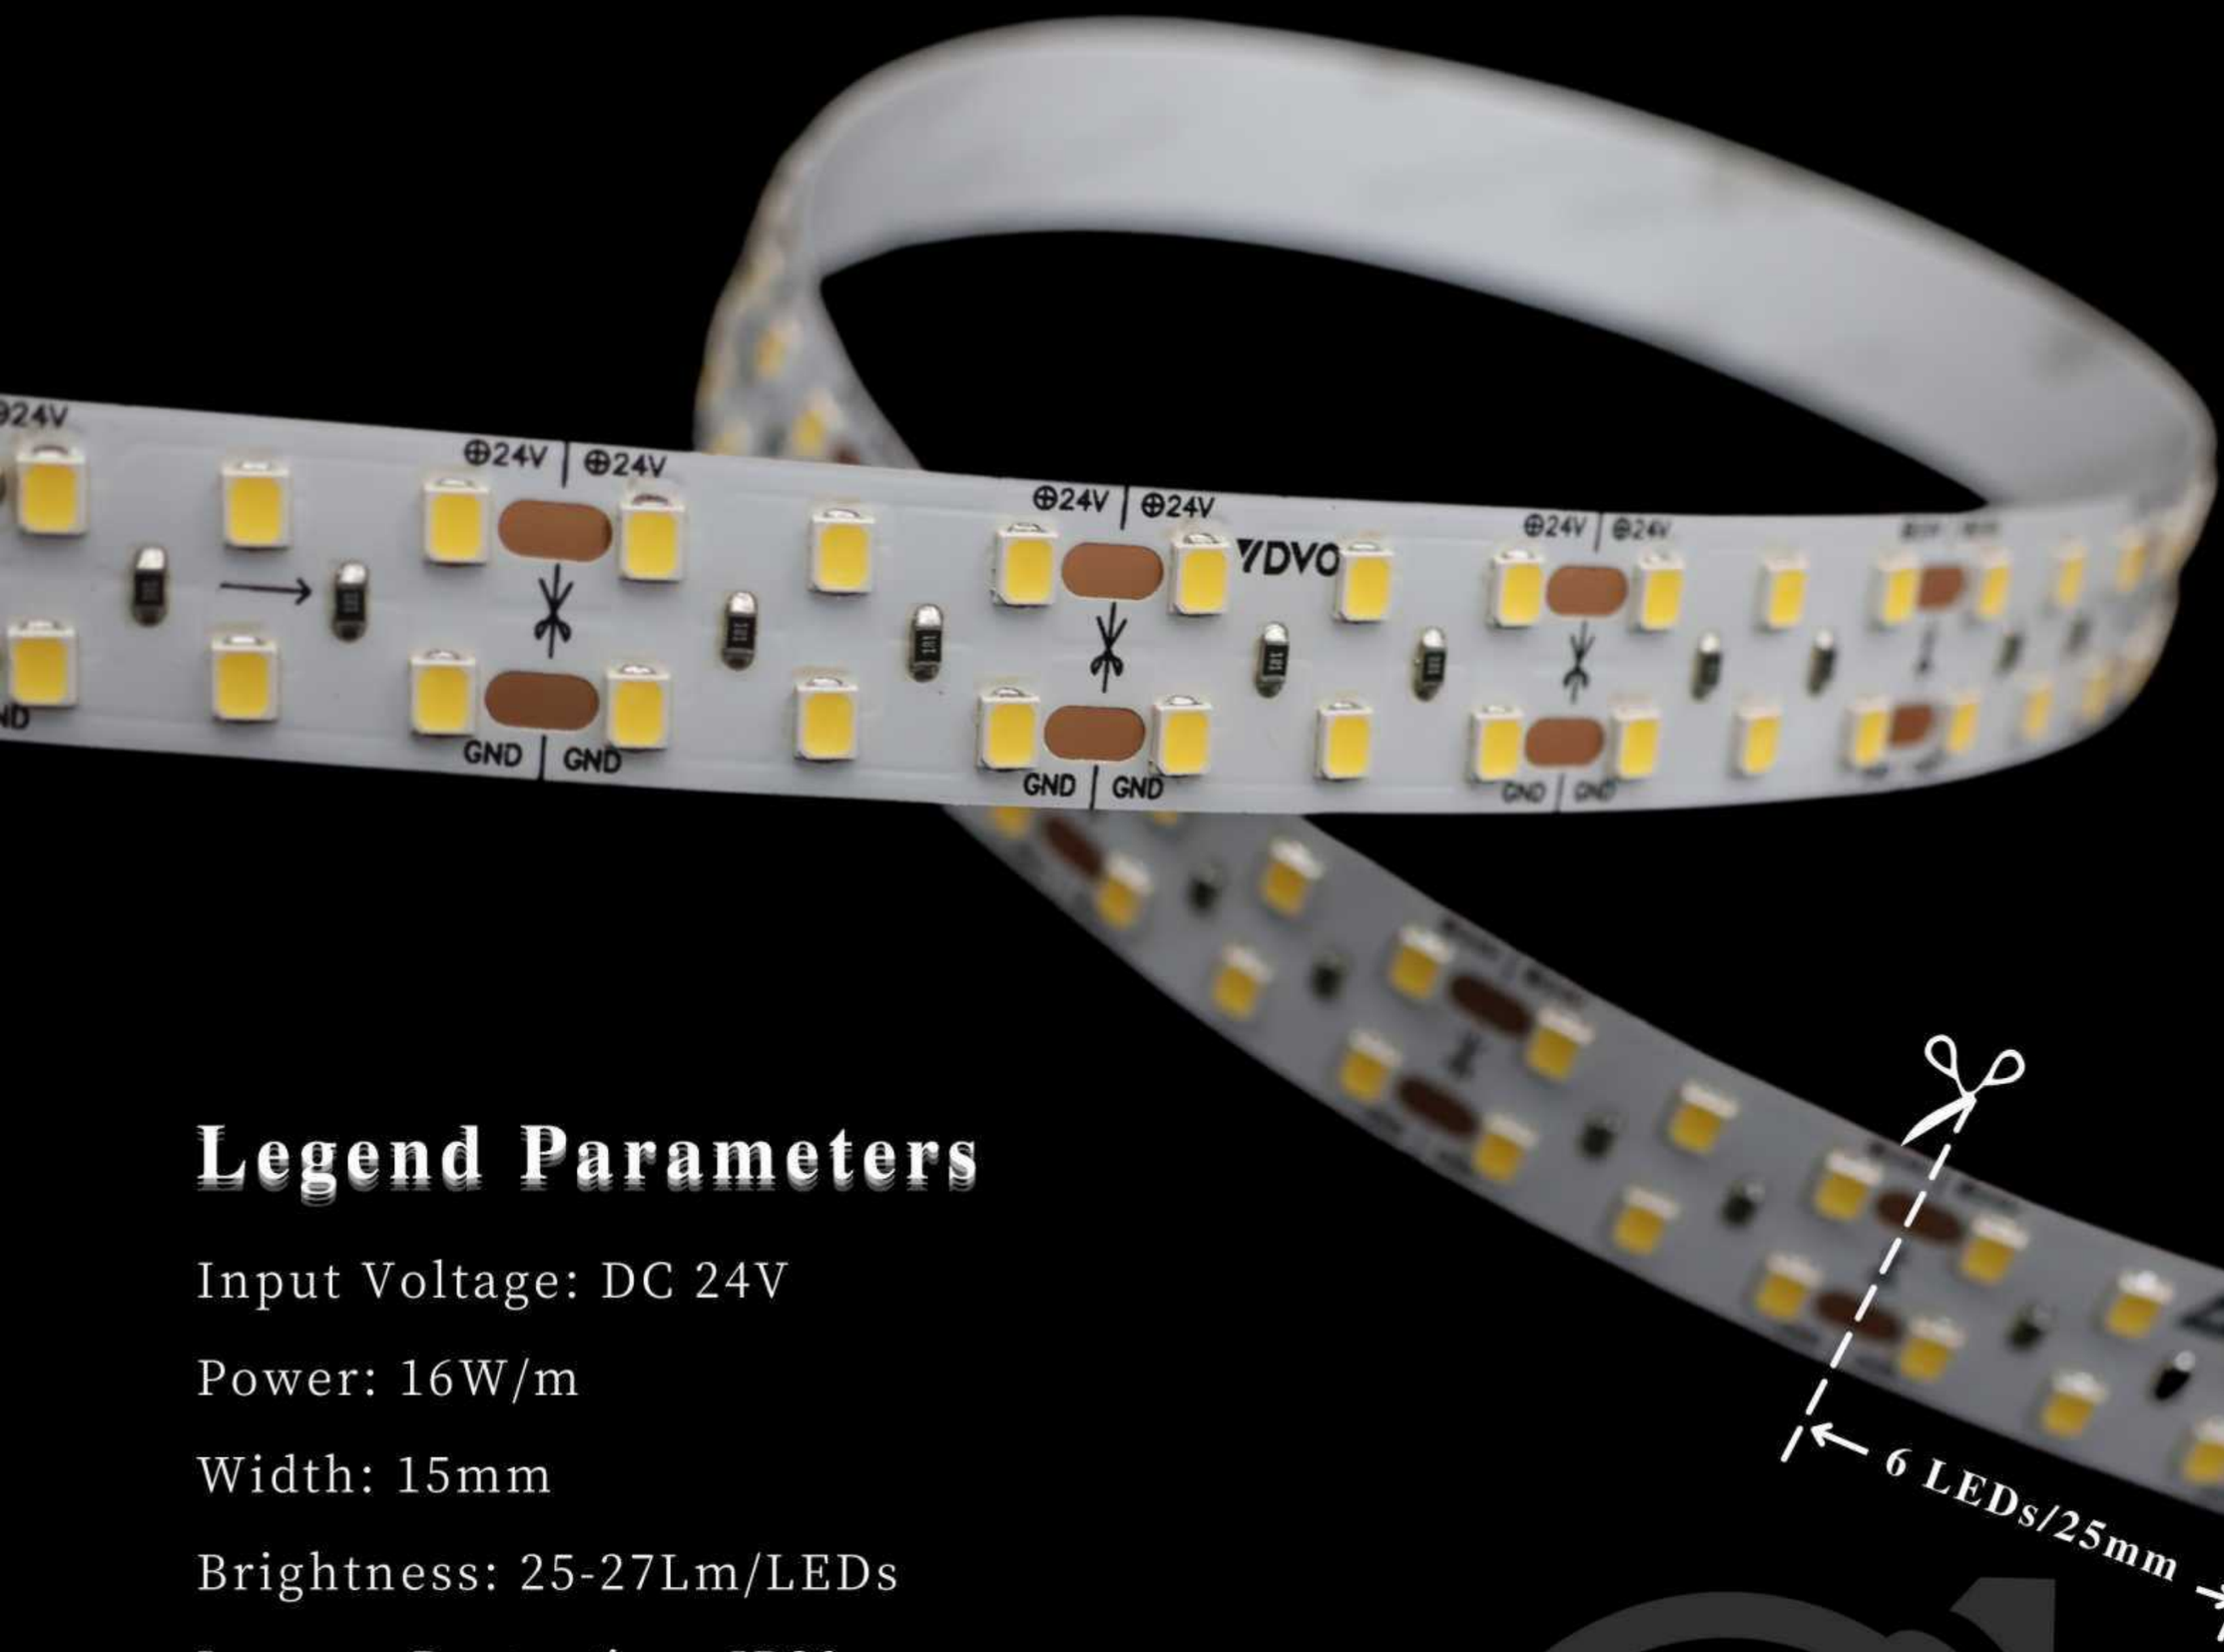

Legend Parameters

Input Voltage: DC 24V

Power: 16W/m

Width: 15mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20


FPC: Double copper foil ,25/70T


CCT: 4000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

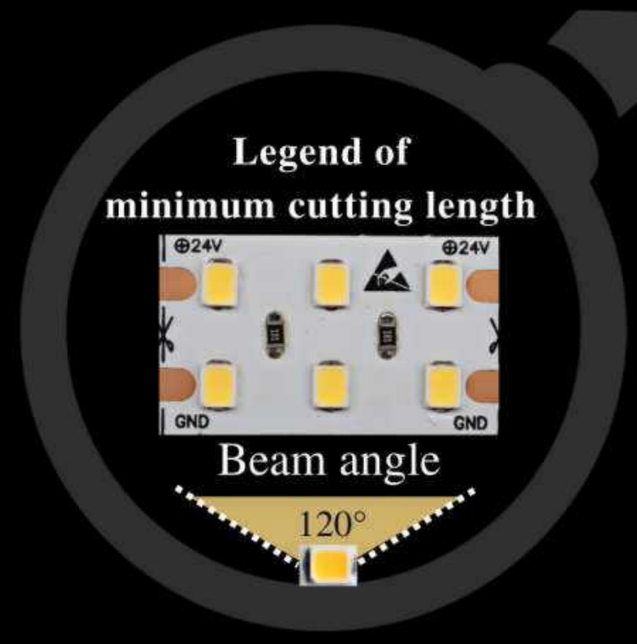

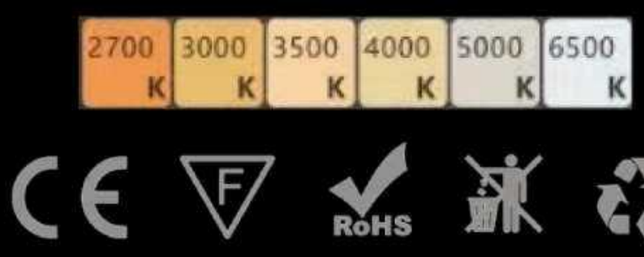

office@guzhenlightingfair.com

12V-2025-150P-6.8mm

One lamp,one resistor.Arbitrary cutting
No soldering required,plug in and light up

Legend Parameters

Input Voltage: DC 12V

Power: 7W/m

Width: 6.8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T


CCT: 6500K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



Beam angle

120°

1 LEDs/6.6mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

12V-2025-120P-6.8mm

One lamp,one resistor.Arbitrary cutting

No soldering required,plug in and light up

Legend Parameters

Input Voltage: DC 12V

Power: 6W/m

Width: 6.8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



1 LEDs/8.3mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-120P-8mm

One light,one cut.Eliminating waste

High density,uniform emission,no spot

Legend Parameters

Input Voltage: DC 24V

Power: 10W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20


FPC: Double copper foil ,25/25T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

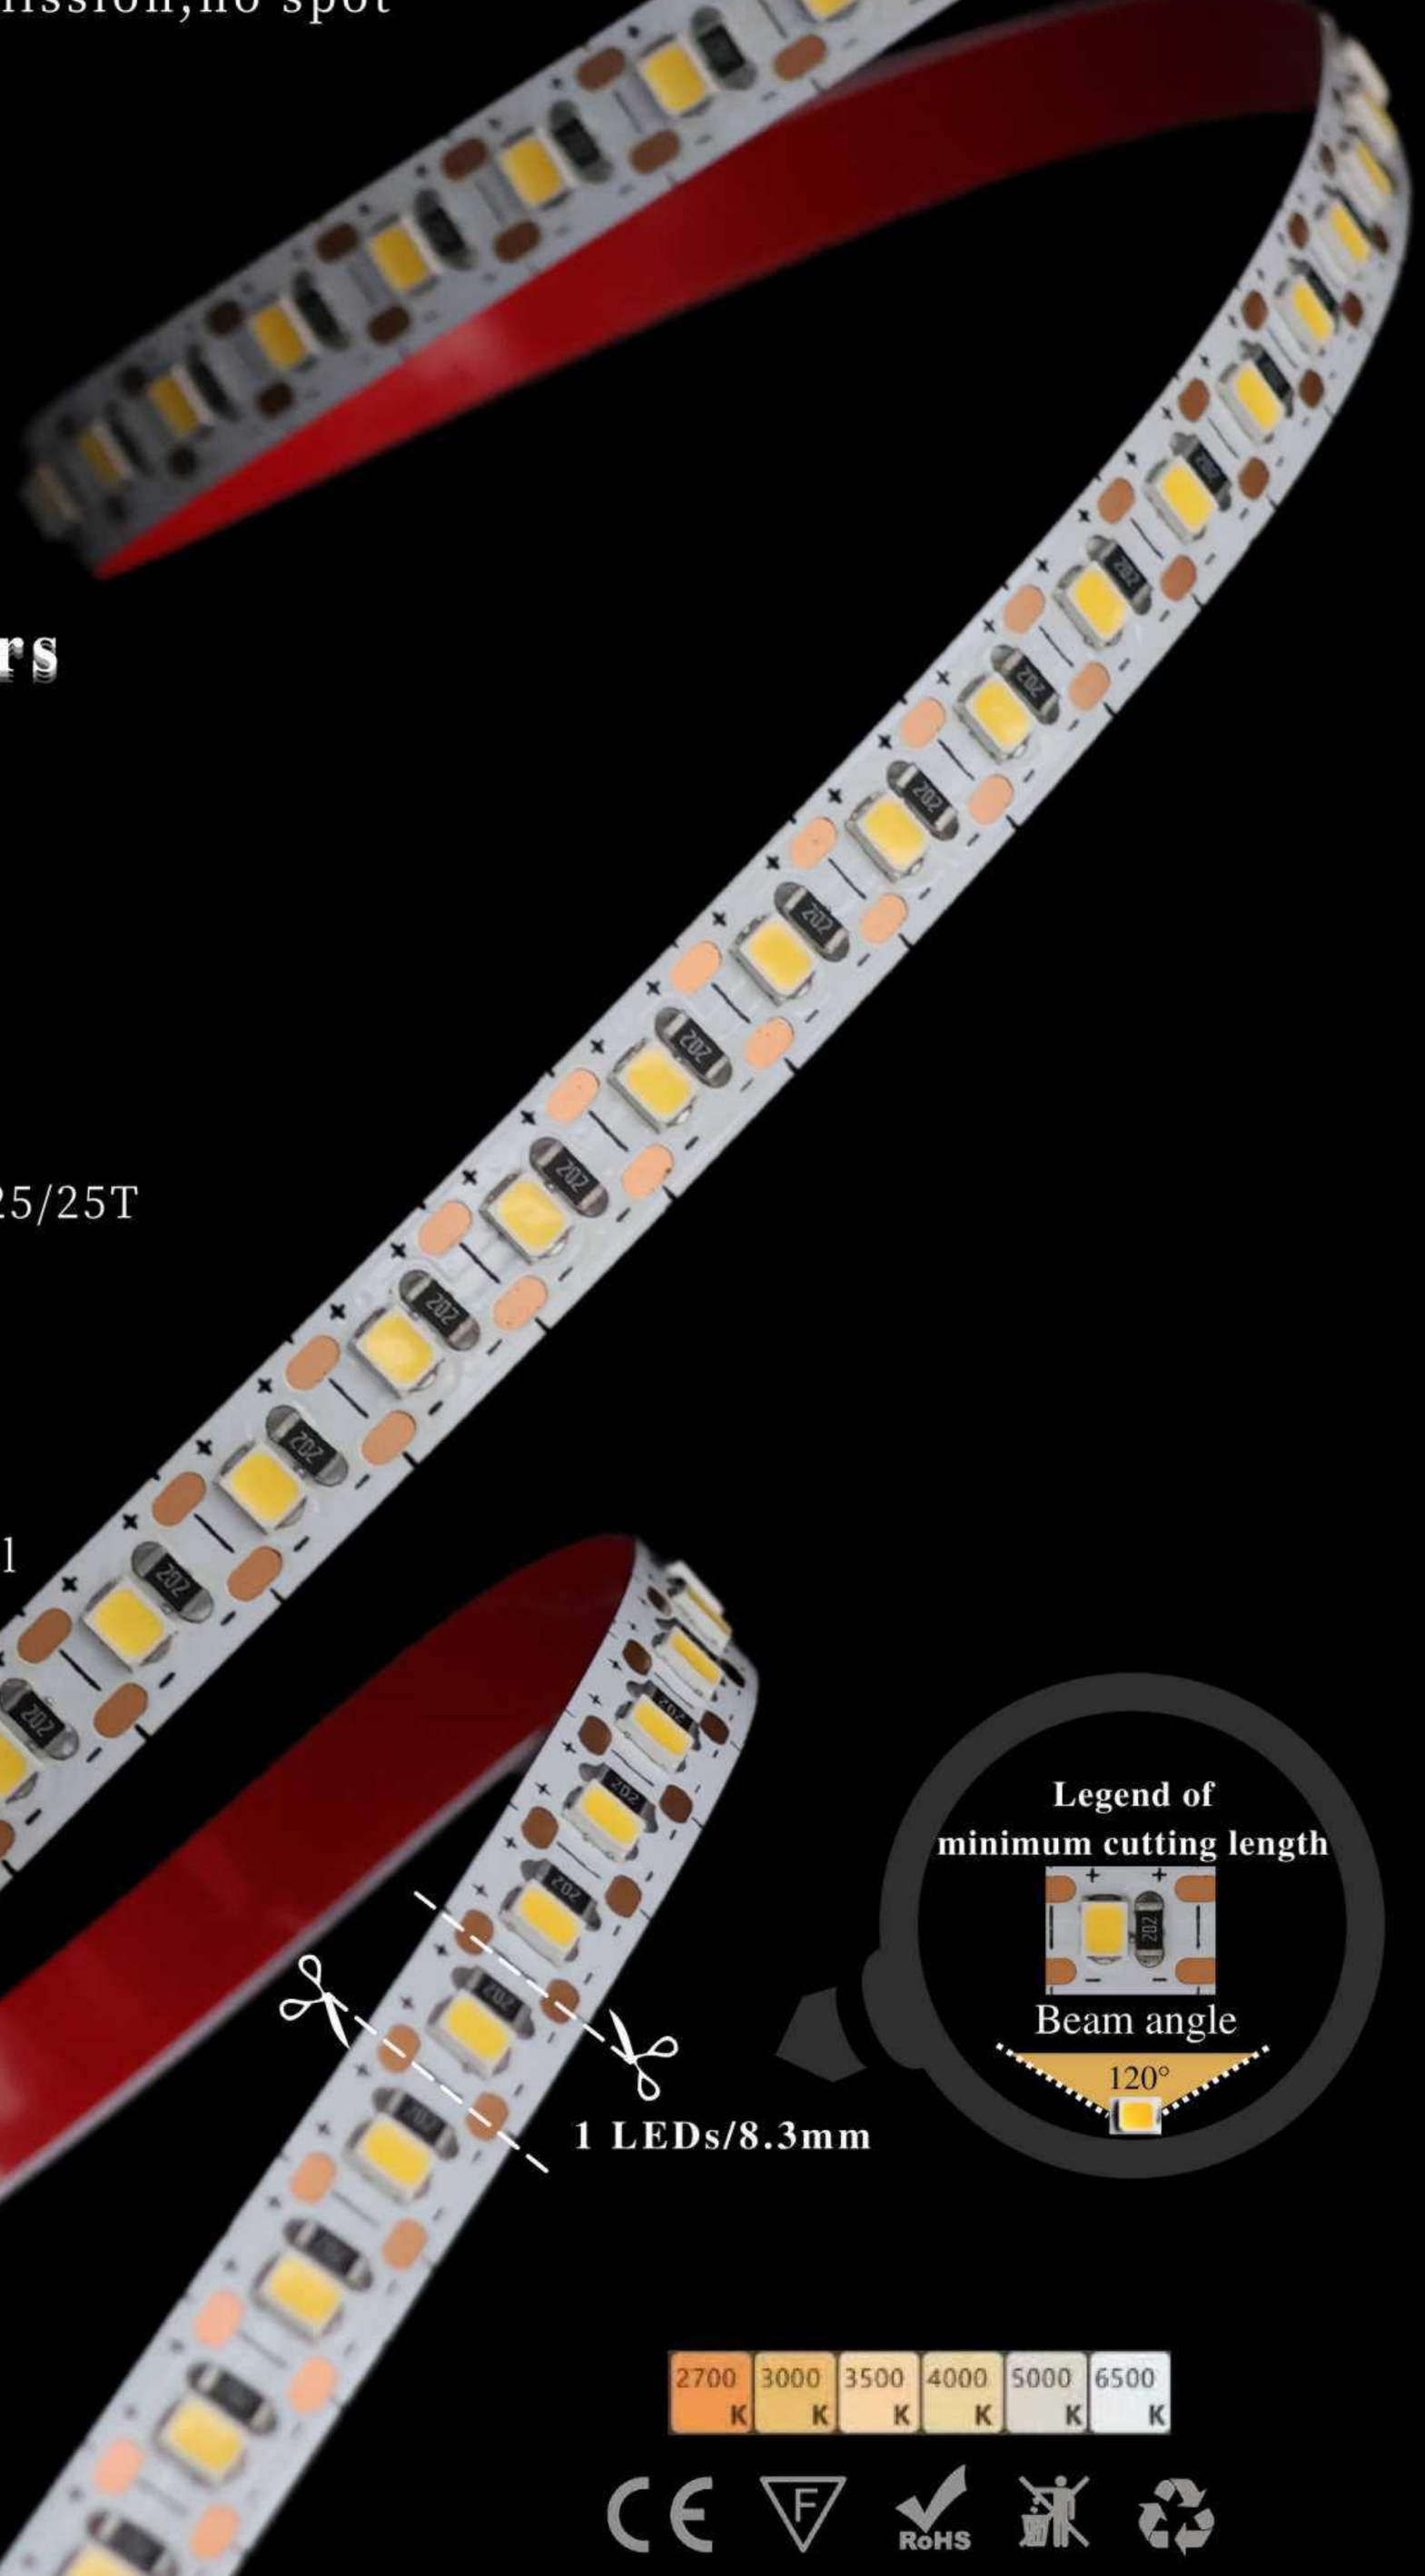

office@guzhenlightingfair.com

24V-2835-108P-8mm-Flowing

High density,low voltage

Various kinds of flowing modes



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-120P-10mm-Flowing

High density,low voltage

Various kinds of flowing modes



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 10mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T


CCT: 6500K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

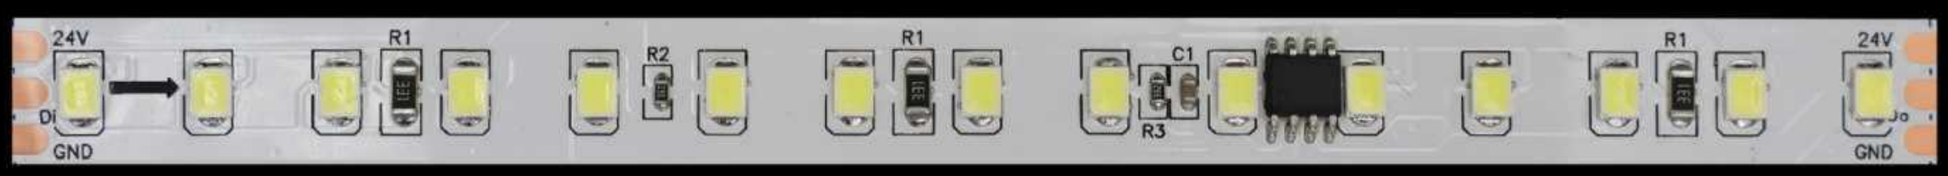

15 LEDs/125mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

24V-2835-126P-8mm-Flowing

High density,low voltage

Various kinds of flowing modes



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection:IP20

FPC: Double copper foil ,25/25T

CCT: 6500K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

21 LEDs/166.6mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

CE F RoHS

office@guzhenlightingfair.com

COB-252P-24V-8mm

High density,low voltage
Various kinds of flowing modes

Legend Parameters

Input Voltage: DC 24V
Power: 10W/m
Width: 8mm
Brightness: 1100Lm/m
Ingress Protection:IP20
FPC: Double copper foil ,25/25T
CCT: 6500K
CRI: >80
SDCM: <3
Specification: 5 or 10m/roll

Legend of minimum cutting length



14 LEDs/55.5mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

COB-320P-24V-8mm

High density,low voltage

Various kinds of flowing modes



Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Brightness: 1200Lm/m

Ingress Protection:IP20

FPC: Double copper foil ,25/25T


CCT: 6500K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

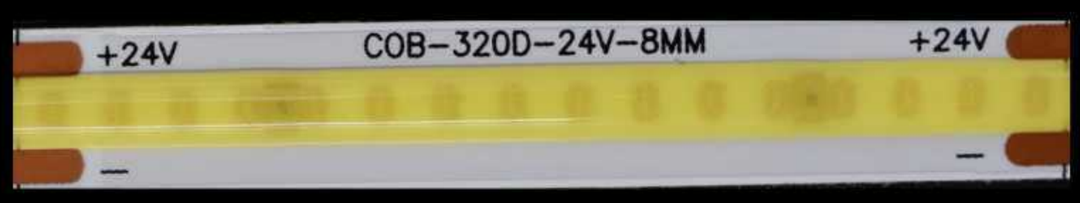

2700K 3000K 3500K 4000K 5000K 6500K

CE F RoHS

office@guzhenlightingfair.com

110V-2835-120P-8mm

High voltage,uniform emission
The strip can be customized



Legend Parameters

Input Voltage: AC 110V

Power: 10W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/35T


CCT: 3000K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

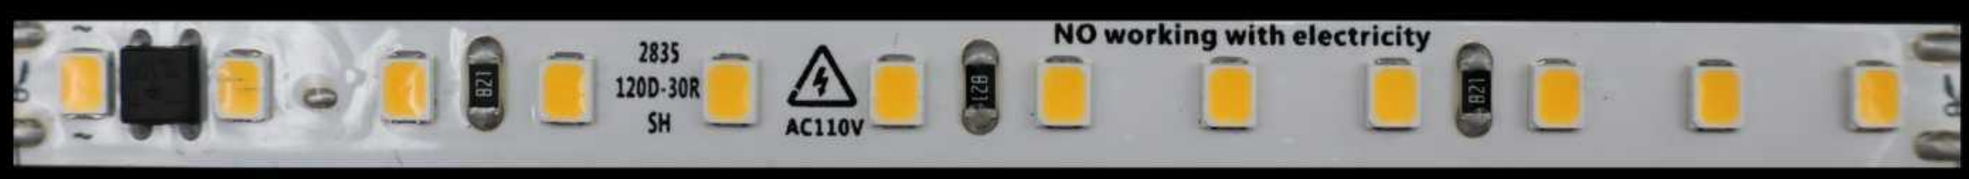

12 LEDs/100mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

220V-2835-120P-8mm

High voltage,uniform emission

The strip can be customized

Legend Parameters

Input Voltage: AC 220V

Power: 12W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,18/35T


CCT: 3000K

CRI: >80

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

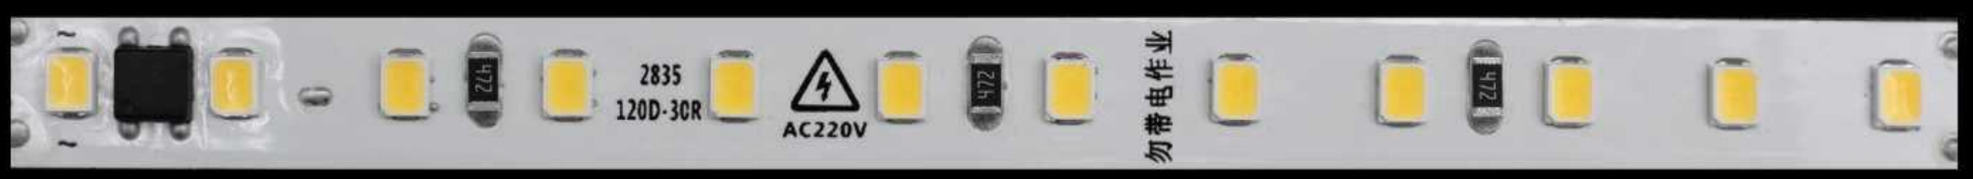

12 LEDs/100mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

220V-2835-120P-8mm-IC

High voltage,uniform emission
The light can flow with IC

Legend Parameters

Input Voltage: AC 220V

Power: 12W/m

Width: 8mm

Brightness: 25-27Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T


CCT: 3000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

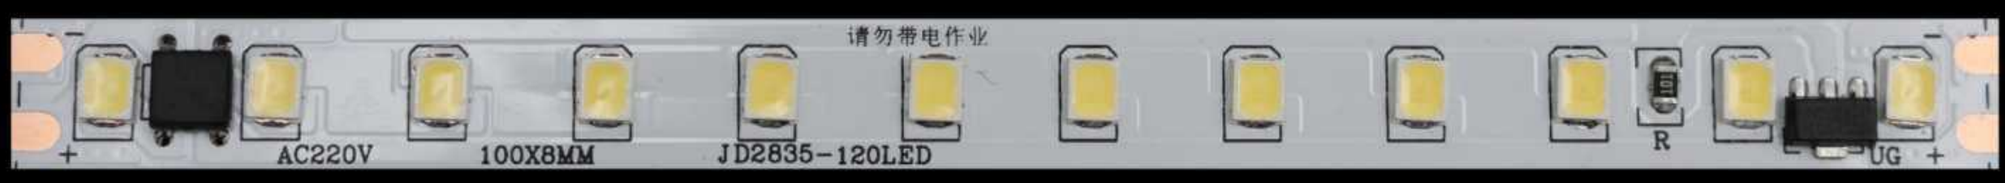

12 LEDs/100mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

office@guzhenlightingfair.com

SMD 2835 Constant pressure two-color series

3000K-5700K

2700K-6500K

2700K-5700K





Using 12/24V human safety low pressure design, FPC double panel with 2 oz thick copper foil inside, effectively stop pressure drop, and ensure the heat dissipation effect of LED chip, effectively extend the service life, can be widely used in a variety of indoor space lighting.

office@guzhenlightingfair.com

24V-2835-224P-10mm-CCT

Two colors of lamp beads together
Uniform emission,no dark field



Legend Parameters

Input Voltage: DC 24V

Power: 8+8 W/m

Width: 10mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/50T

CCT: 2500~7000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

14 LEDs/62.5mm

2700 K | 3000 K | 3500 K | 4000 K | 5000 K | 6500 K

RoHS

office@guzhenlightingfair.com

24V-2835-120P-8mm-CCT-2 in 1

Two colors in one lamp bead
Uniform emission,no dark field



Legend of minimum cutting length



Legend Parameters

Input Voltage: DC 24V

Power: 7+7 W/m

Width: 8mm

Brightness: 24-26Lm/LEDs

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: 2500~7000K

CRI: >90

SDCM: <3

Specification: 5 or 10m/roll

2700 K	3000 K	3500 K	4000 K	5000 K	6500 K

office@guzhenlightingfair.com

SMD 3535 / SMD 5050

Constant pressure color light series



Using 12/24V human safety low pressure design, FPC double panel with 2 oz thick copper foil inside, effectively stop pressure drop, and ensure the heat dissipation effect of LED chip, effectively extend the service life, can be widely used in a variety of indoor space lighting.



office@guzhenlightingfair.com

24V-3535-120P-8mm-RGB

Three-primary colors of red,green,blue
various coloured lights will produce
Strong sense of atmosphere

Legend Parameters

Input Voltage: DC 24V

Power: 12W/m

Width: 8mm

Pixel: 10PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/35T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



6 LEDs/50mm

office@guzhenlightingfair.com

12V-5050-60P-10mm-RGB

Three-primary colors of red,green,blue
various coloured lights will produce
Strong sense of atmosphere

Legend Parameters

Input Voltage: DC 12V

Power: 14W/m

Width: 10mm

Pixel: 20PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll



Legend of minimum cutting length



3 LEDs/50mm

office@guzhenlightingfair.com

24V-5050-60P-10mm-RGB

Three-primary colors of red,green,blue
various coloured lights will produce
Strong sense of atmosphere

Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 8mm

Pixel: 10PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



office@guzhenlightingfair.com

24V-5050-60P-12mm-RGBW

RGB with White in one lamp
various coloured lights will produce
Strong sense of atmosphere



Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 12mm

Pixel: 10PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B,W

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length

6 LEDs/100mm

office@guzhenlightingfair.com

24V-5050-60P-12mm-RGBCW

Five colors in one:RGB,white,warm white
various coloured lights will produce
Strong sense of atmosphere



Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 12mm

Pixel: 10PX/m

Ingress Protection:IP20

FPC: Double copper foil ,35/35T

CCT: R,G,B,W,WW

SDCM: <3

Specification: 5 or 10m/roll



Legend of minimum cutting length



6 LEDs/100mm

office@guzhenlightingfair.com

Constant pressure magic color series

Each set of 6 leds can be controlled individually, and each idea can be programmed

SMD 5050



DMX Series

features:
-Good compatibility
-High reliability
-Strong resistance
to signal interference



SPI Series

features:
-Easy wiring
-Economic and efficient

office@guzhenlightingfair.com

24V-5050-60P-10mm-RGB-IC

Various coloured lights will produce
Strong sense of atmosphere,more playability

Legend Parameters

Input Voltage: DC 24V
Power: 14W/m
Width: 10mm
Pixel: 10PX/m
Ingress Protection:IP20
FPC: Double copper foil ,25/25T
CCT: R,G,B
SDCM: <3
Specification: 5 or 10m/roll



Legend of minimum cutting length



6 LEDs/100mm

office@guzhenlightingfair.com

12V-5050-60P-10mm-RGB-IC

Various coloured lights will produce
Strong sense of atmosphere,more playability

Legend Parameters

Input Voltage: DC 12V
Power: 14W/m
Width: 10mm
Pixel: 20PX/m
Ingress Protection:IP20
FPC: Double copper foil ,25/25T
CCT: R,G,B
SDCM: <3
Specification: 5 or 10m/roll



Legend of minimum cutting length

3 LEDs/50mm

CE RoHS

office@guzhenlightingfair.com

12V-5050-60P-10mm-RGB-IC

Single break-point continuation

Strong sense of atmosphere,more playability



Legend Parameters

Input Voltage: DC 12V

Power: 14W/m

Width: 10mm

Pixel: 20PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



3 LEDs/50mm

office@guzhenlightingfair.com

12V-5050-60P-10mm-RGB-IC

Single break-point continuation
Strong sense of atmosphere,more playability



Legend Parameters

Input Voltage: DC 12V

Power: 14W/m

Width: 10mm

Pixel: 20PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



3 LEDs/50mm

office@guzhenlightingfair.com

24V-5050-60P-10mm-RGB-IC

Single break-point continuation

Strong sense of atmosphere,more playability



Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 10mm

Pixel: 10PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



6 LEDs/100mm

office@guzhenlightingfair.com

24V-5050-60P-10mm-RGB-IC

Single break-point continuation

Strong sense of atmosphere,more playability



Legend Parameters

Input Voltage: DC 24V

Power: 14W/m

Width: 10mm

Pixel: 10PX/m

Ingress Protection: IP20

FPC: Double copper foil ,25/25T

CCT: R,G,B

SDCM: <3

Specification: 5 or 10m/roll

Legend of minimum cutting length



6 LEDs/100mm

RoHS

office@guzhenlightingfair.com

Waterproofing technology


OUTDOOR & UNDERWATER

FIVE KINDS OF TECHNOLOGY.INCLUDING
THE DROP SILICONE,HALF A PACK
SOLID,FULL PACKAGE HOLLOW,FULL
PACKAGE HOLLOW ,THE SILICONE TUBE .



office@guzhenlightingfair.com

THE DROP SILICONE IP44t

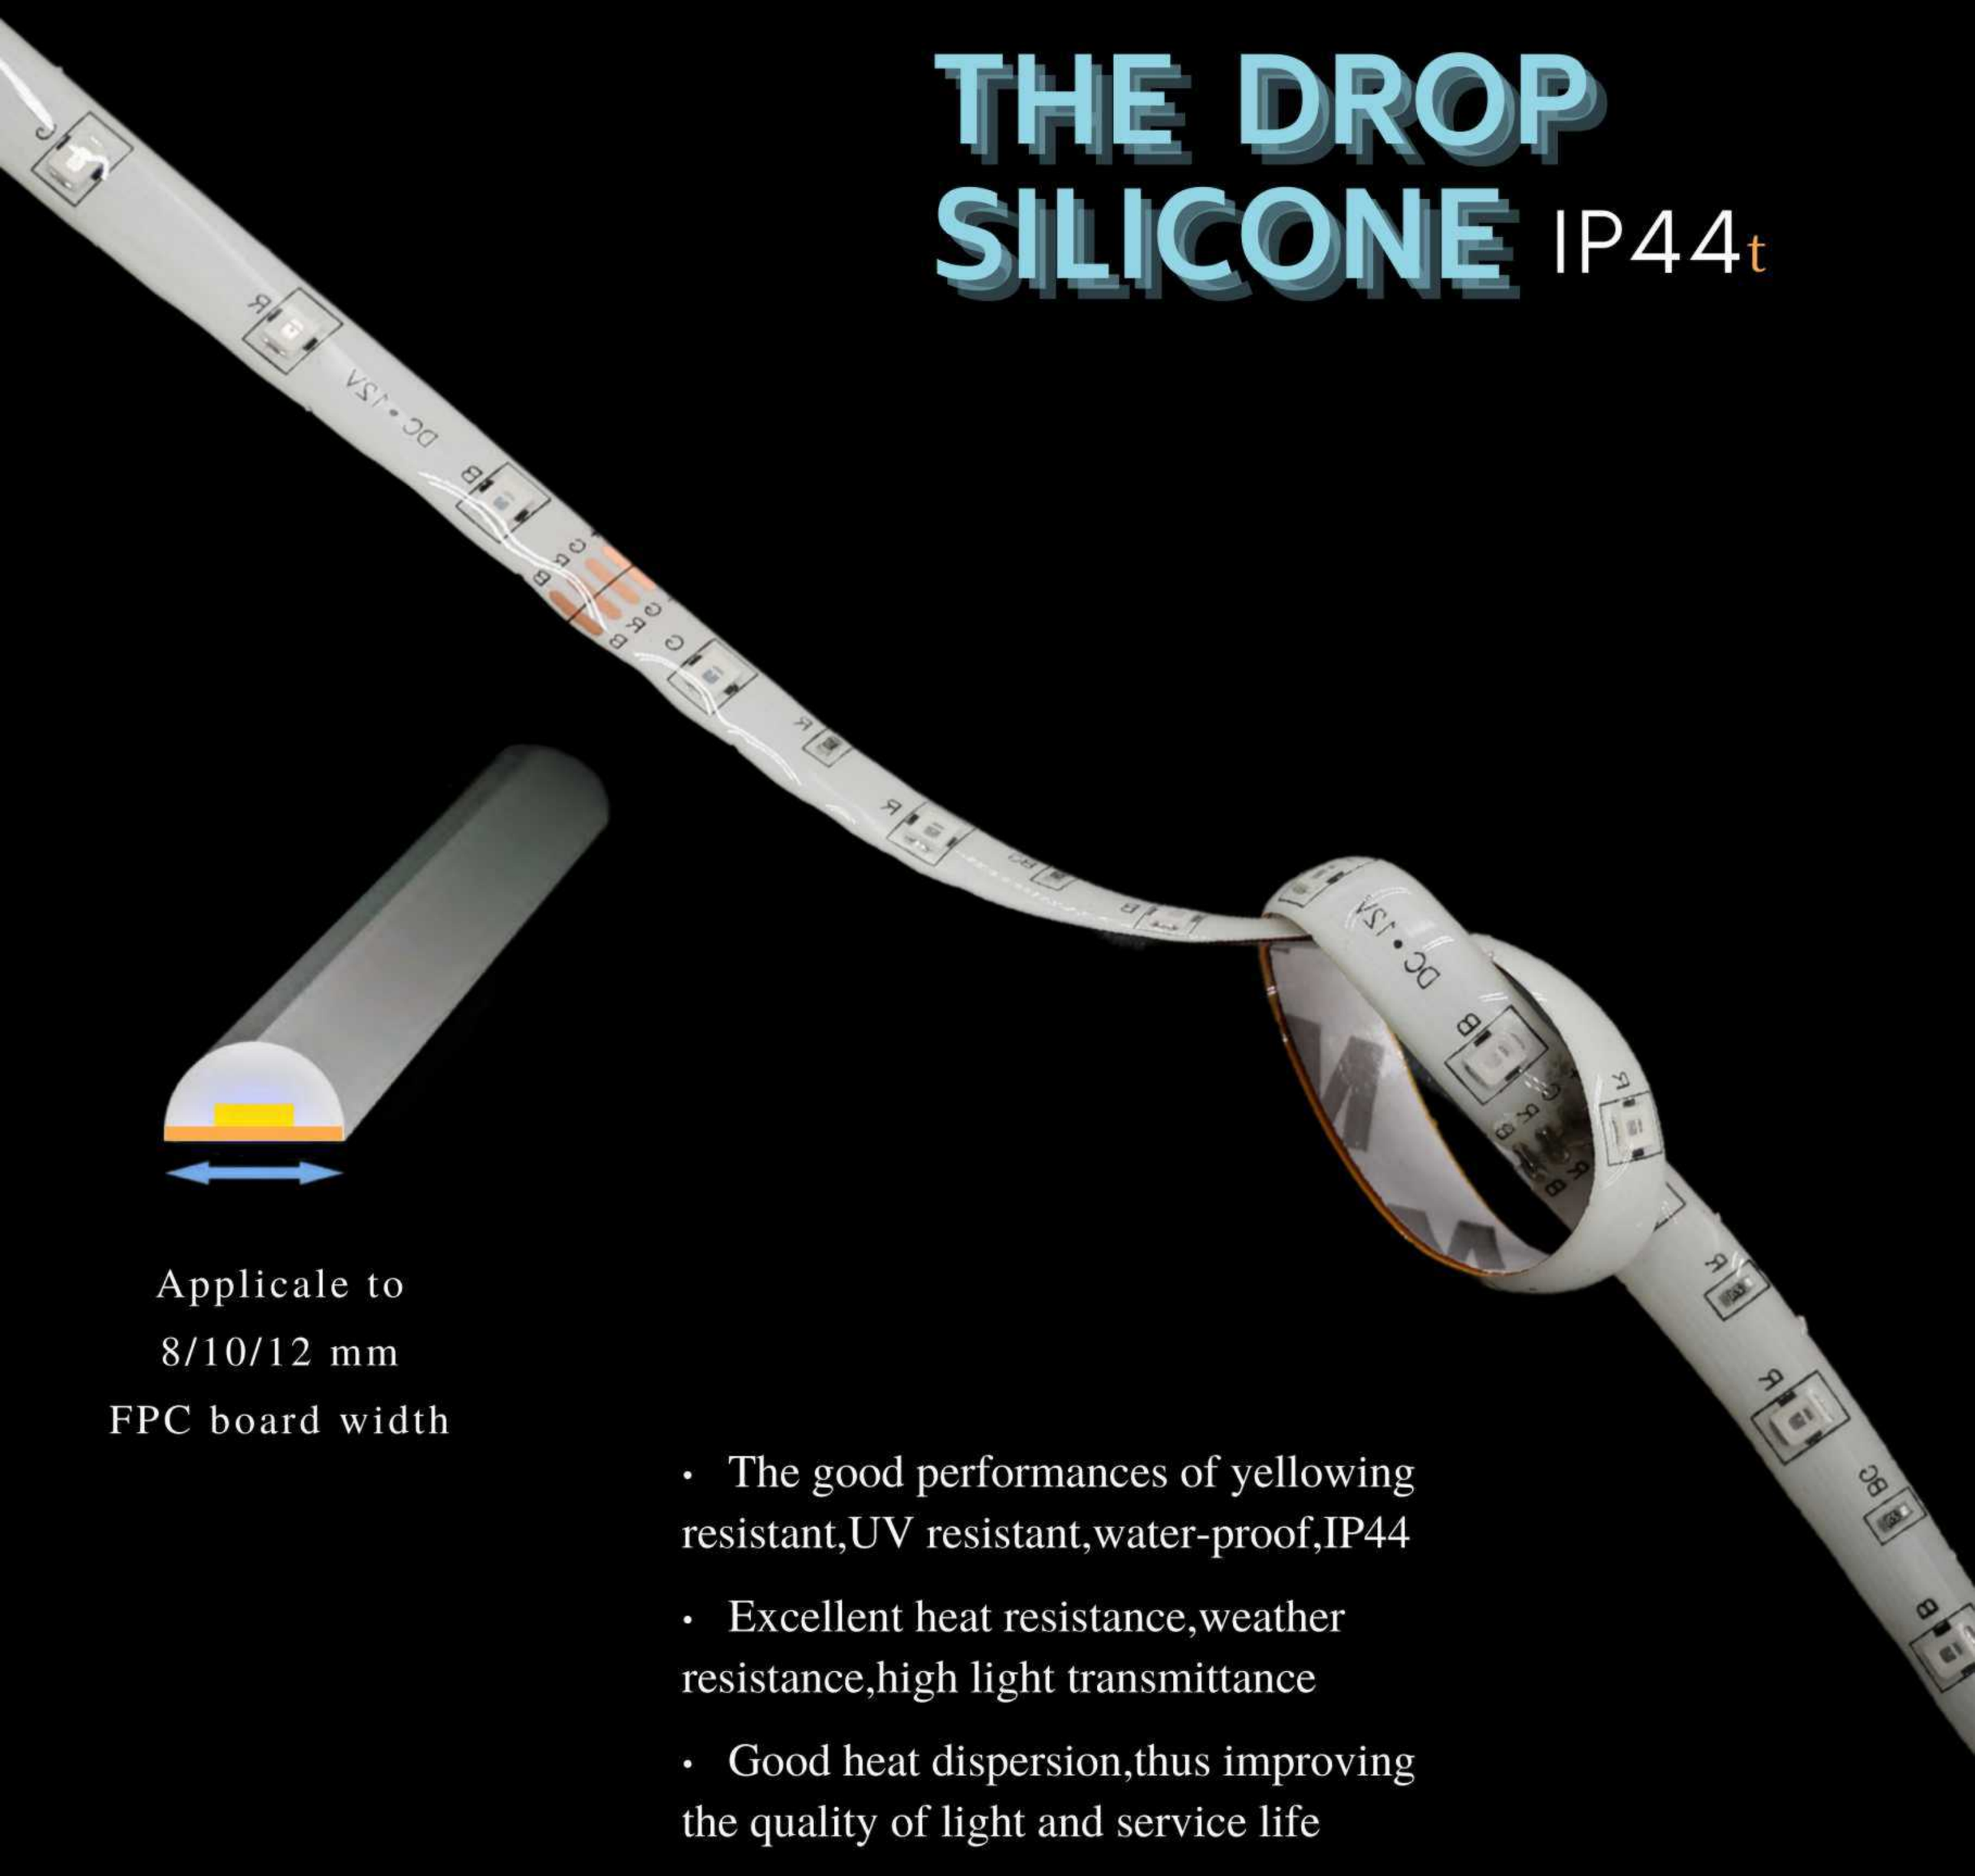


Applicale to

8/10/12 mm


FPC board width

- The good performances of yellowing resistant,UV resistant,water-proof,IP44
- Excellent heat resistance,weather resistance,high light transmittance
- Good heat dispersion,thus improving the quality of light and service life

SECTIONAL VIEW

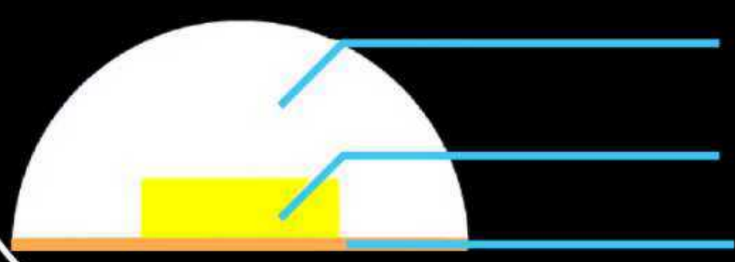

PROFILE DISPLAY

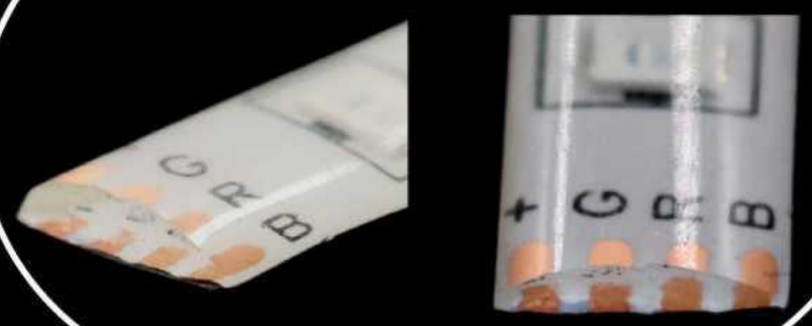

office@guzhenlightingfair.com


HALF A PACK SOLID IP68 t



Applicale to
8/10/12 mm
FPC board width

- The good performances of yellowing resistant,UV resistant,water-proof,IP68
- Excellent heat resistance,weather resistance,high light transmittance
- Good heat dispersion,thus improving the quality of light and service life

SECTIONAL VIEW

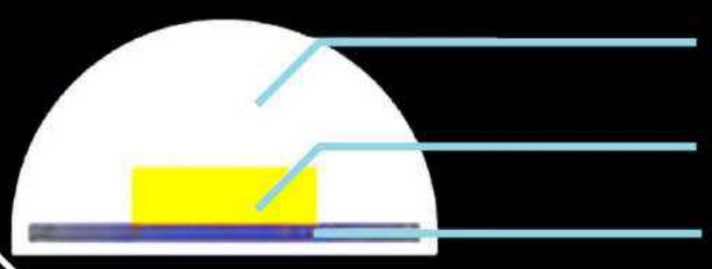

PROFILE DISPLAY



office@guzhenlightingfair.com

FULL PACKAGE HOLLOW IP65 t



Applicale to
8/10/12 mm
FPC board width

- The good performances of yellowing resistant,UV resistant,water-proof,IP65
- Excellent heat resistance,weather resistance,high light transmittance
- Good heat dispersion,thus improving the quality of light and service life

SECTIONAL VIEW




PROFILE DISPLAY



office@guzhenlightingfair.com


FULL PACKAGE SO LID IP68 t

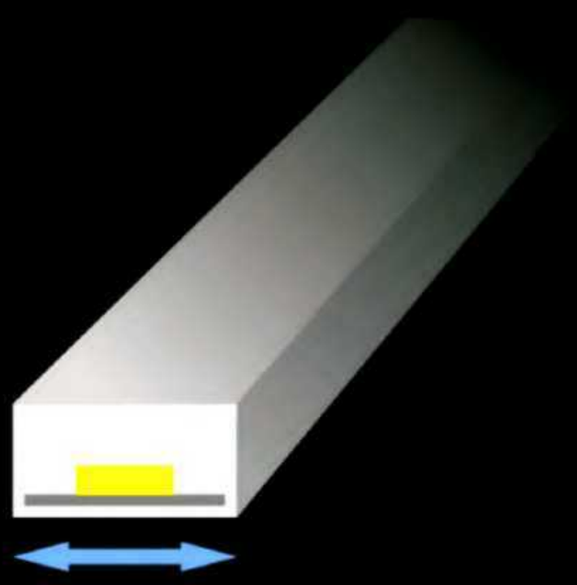


Applicale to
8/10/12 mm
FPC board width

- The good performances of yellowing resistant,UV resistant,water-proof,IP68
- Excellent heat resistance,weather resistance,high light transmittance
- Good heat dispersion,thus improving the quality of light and service life

SECTIONAL VIEW

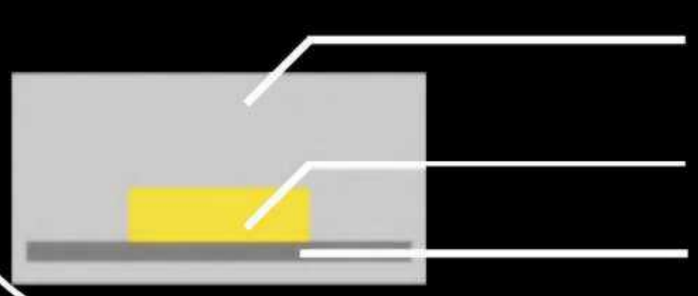

PROFILE DISPLAY

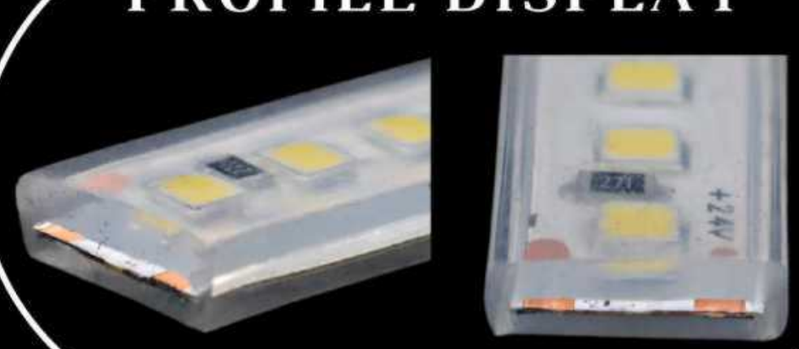

office@guzhenlightingfair.com


THE SILICONE TUBE IP65 t



Applicale to
8/10/12 mm
FPC board width

- The good performances of yellowing resistant,UV resistant,water-proof,IP65
- Excellent heat resistance,weather resistance,high light transmittance
- Good heat dispersion,thus improving the quality of light and service life

SECTIONAL VIEW

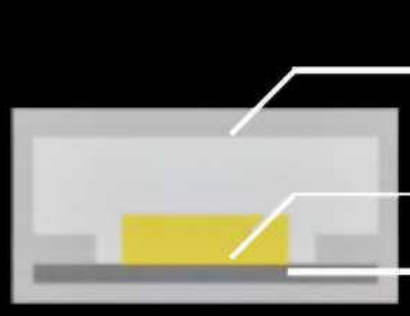



PROFILE DISPLAY



office@guzhenlightingfair.com


POWER

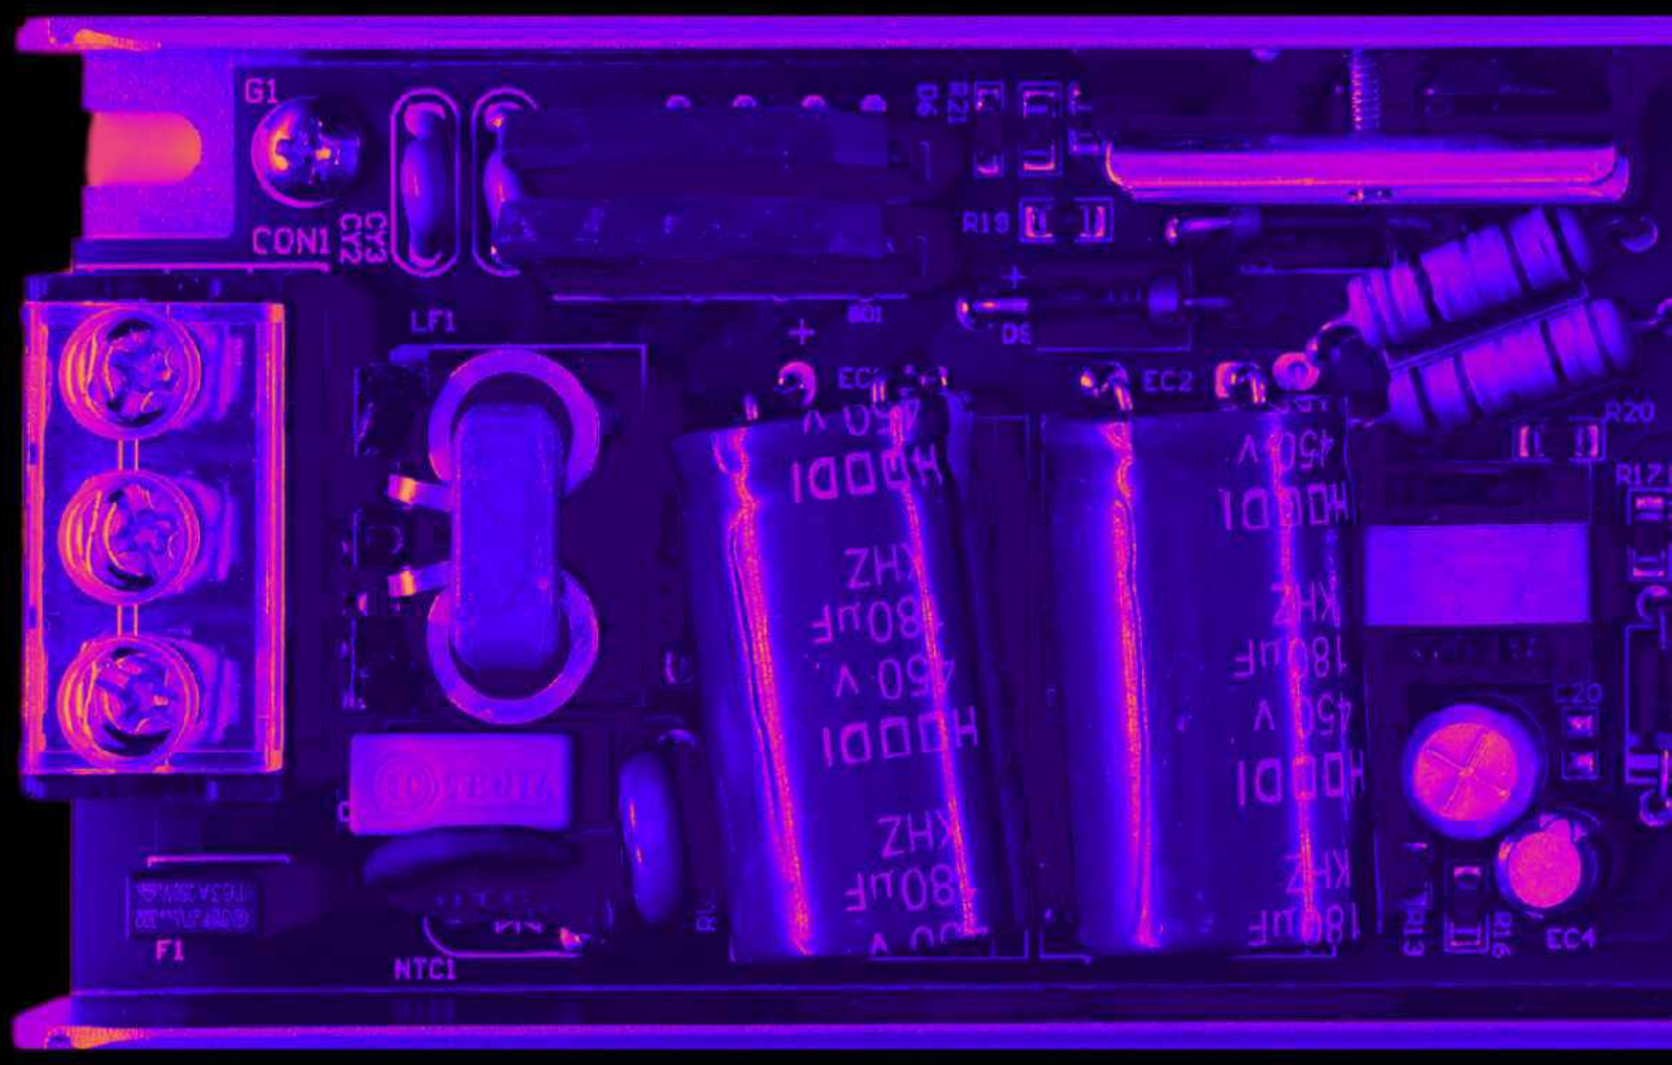


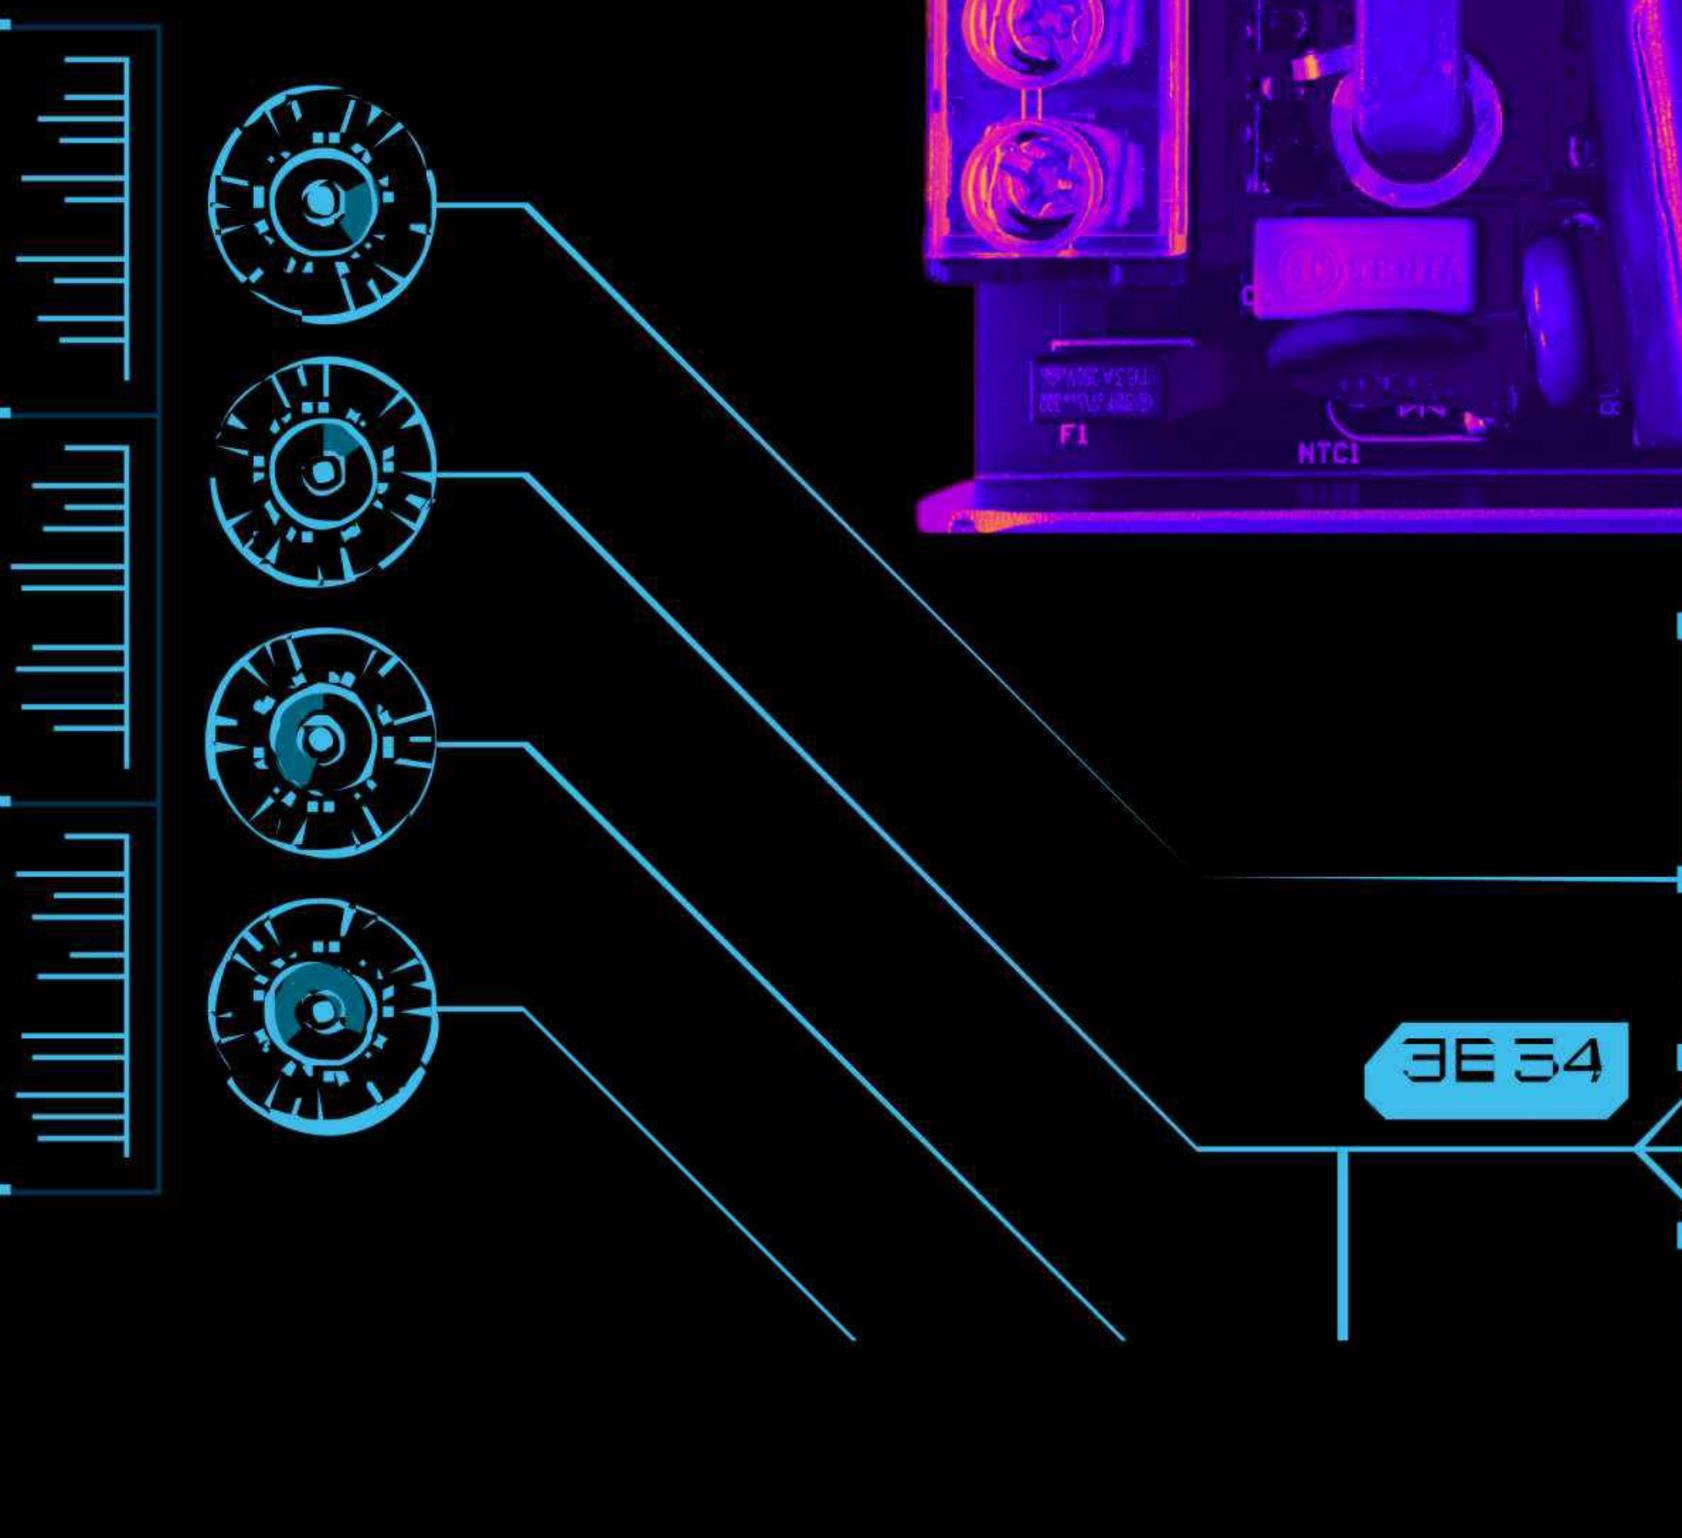

office@guzhenlightingfair.com

SUPPLY

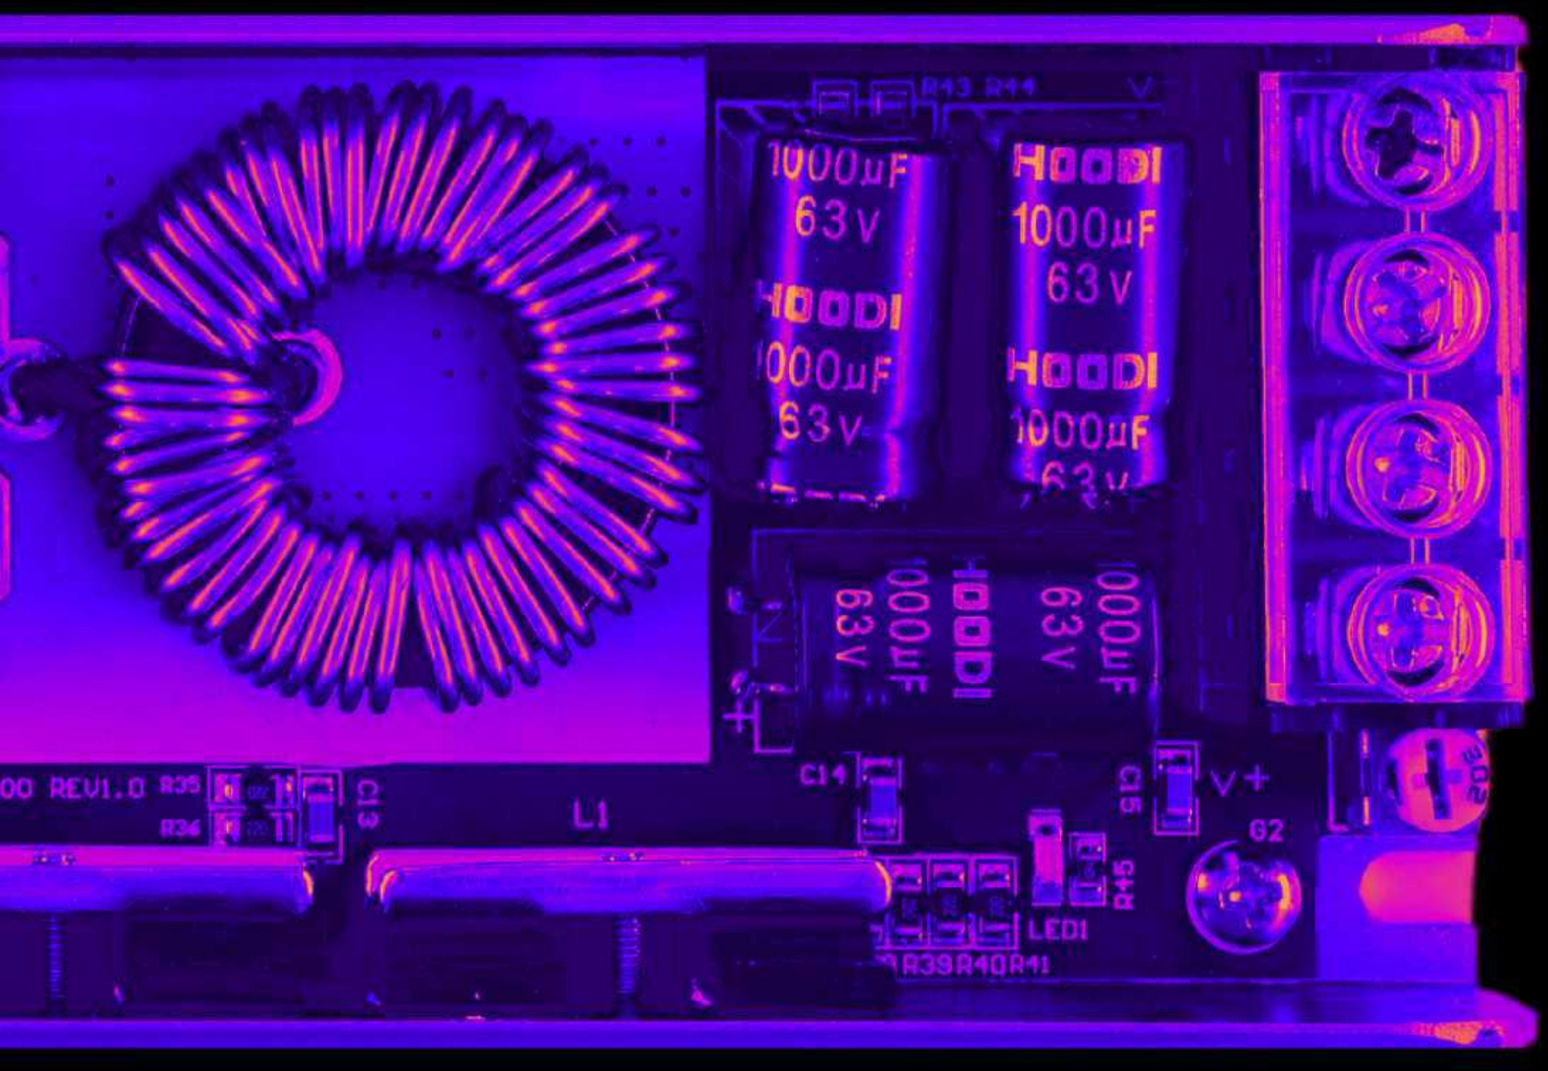


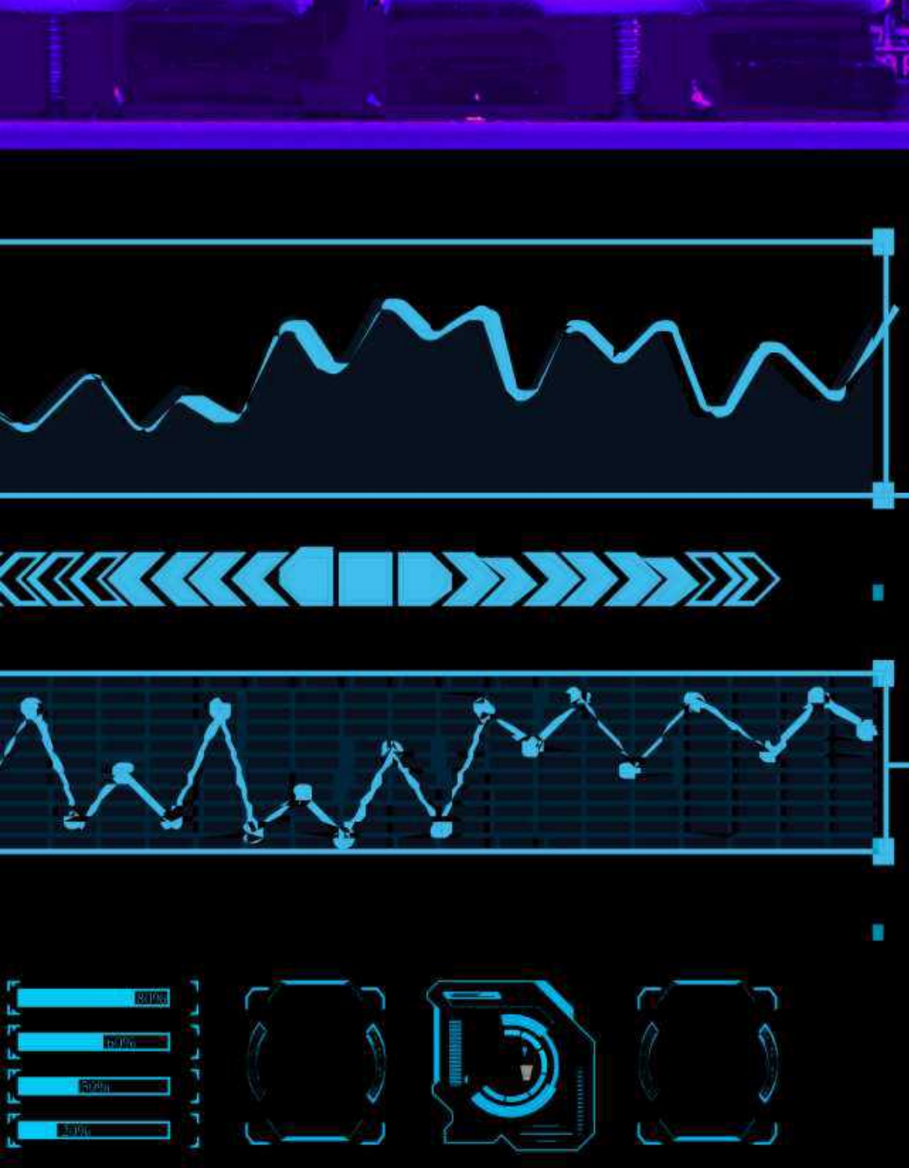

Medium specification type,
constant pressure working mode

office@guzhenlightingfair.com



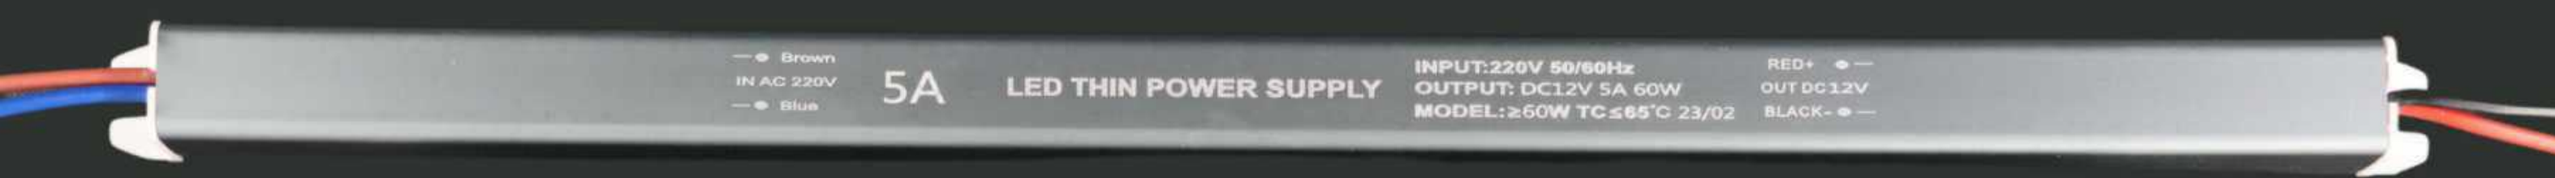







Ultra Thin Strip LED Power Supply

CE IP20 RoHS SELV

office@guzhenlightingfair.com



AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~1.5A ~18W
PRODUCT SIZE	L110*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~2A ~24W
PRODUCT SIZE	L120*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~3A ~36W
PRODUCT SIZE	L230*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~4A ~48W
PRODUCT SIZE	L250*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified




AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~5A ~60W
PRODUCT SIZE	L320*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V <65℃
DC OUTPUT	DC 24V ~6A ~72W
PRODUCT SIZE	L350*W17.5*H17.5mm
PRODUCT COLOR	Silver gray
SAFETY STANDARDS	CCC,CE certified

office@guzhenlightingfair.com

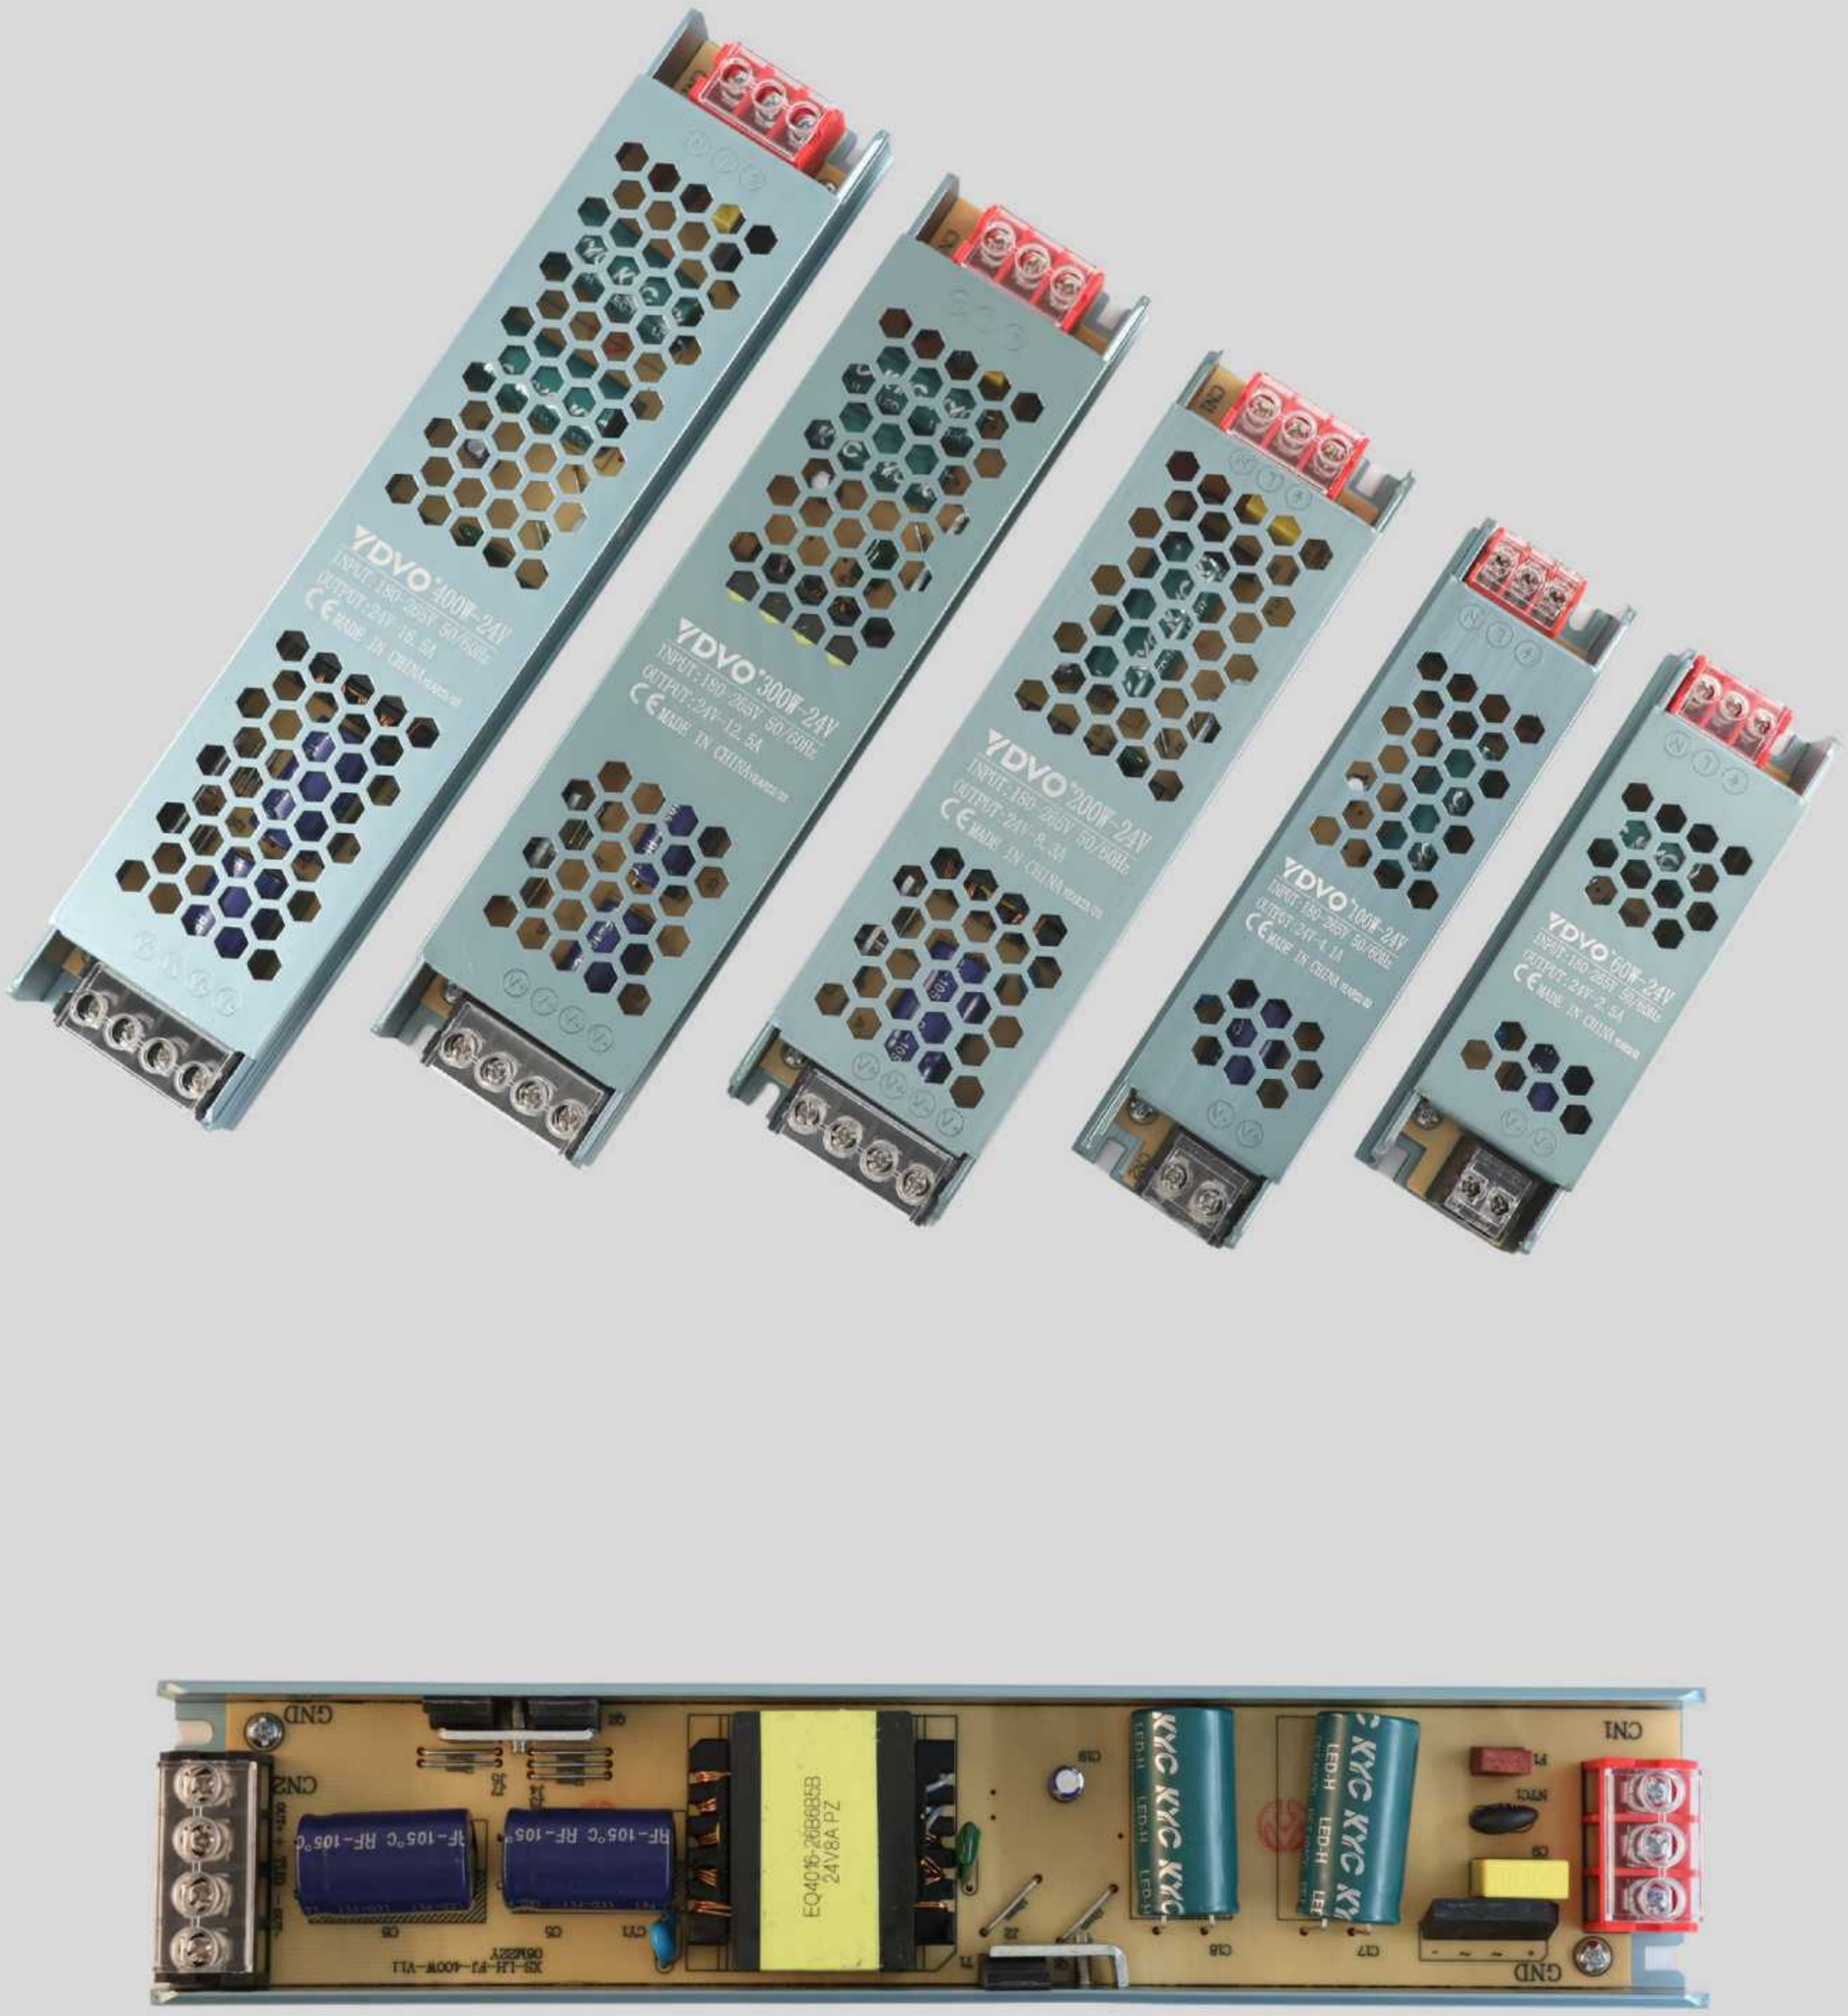

Black King-Kong

Super Thin Series LED Power Supply

CE IP20 RoHS SELV

office@guzhenlightingfair.com



AC INPUT	AC 180-265V 50/60Hz
DC OUTPUT	DC 24V ~2.5A
POWER	MAX 60W @50℃
PRODUCT SIZE	L120*W35*H23mm
PRODUCT COLOR	Lake blue(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 180-265V 50/60Hz
DC OUTPUT	DC 24V ~4.1A
POWER	MAX 100W @50℃
PRODUCT SIZE	L150*W35*H23mm
PRODUCT COLOR	Lake blue(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 180-265V 50/60Hz
DC OUTPUT	DC 24V ~4.1A
POWER	MAX 200W @50℃
PRODUCT SIZE	L190*W50*H23mm
PRODUCT COLOR	Lake blue(housing)
SAFETY STANDARDS	CCC,CE certified




AC INPUT	AC 180-265V 50/60Hz
DC OUTPUT	DC 24V ~4.1A
POWER	MAX 300W @50℃
PRODUCT SIZE	L205*W50*H23mm
PRODUCT COLOR	Lake blue(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 180-265V 50/60Hz
DC OUTPUT	DC 24V ~4.1A
POWER	MAX 400W @50℃
PRODUCT SIZE	L240*W50*H23mm
PRODUCT COLOR	Lake blue(housing)
SAFETY STANDARDS	CCC,CE certified

office@guzhenlightingfair.com

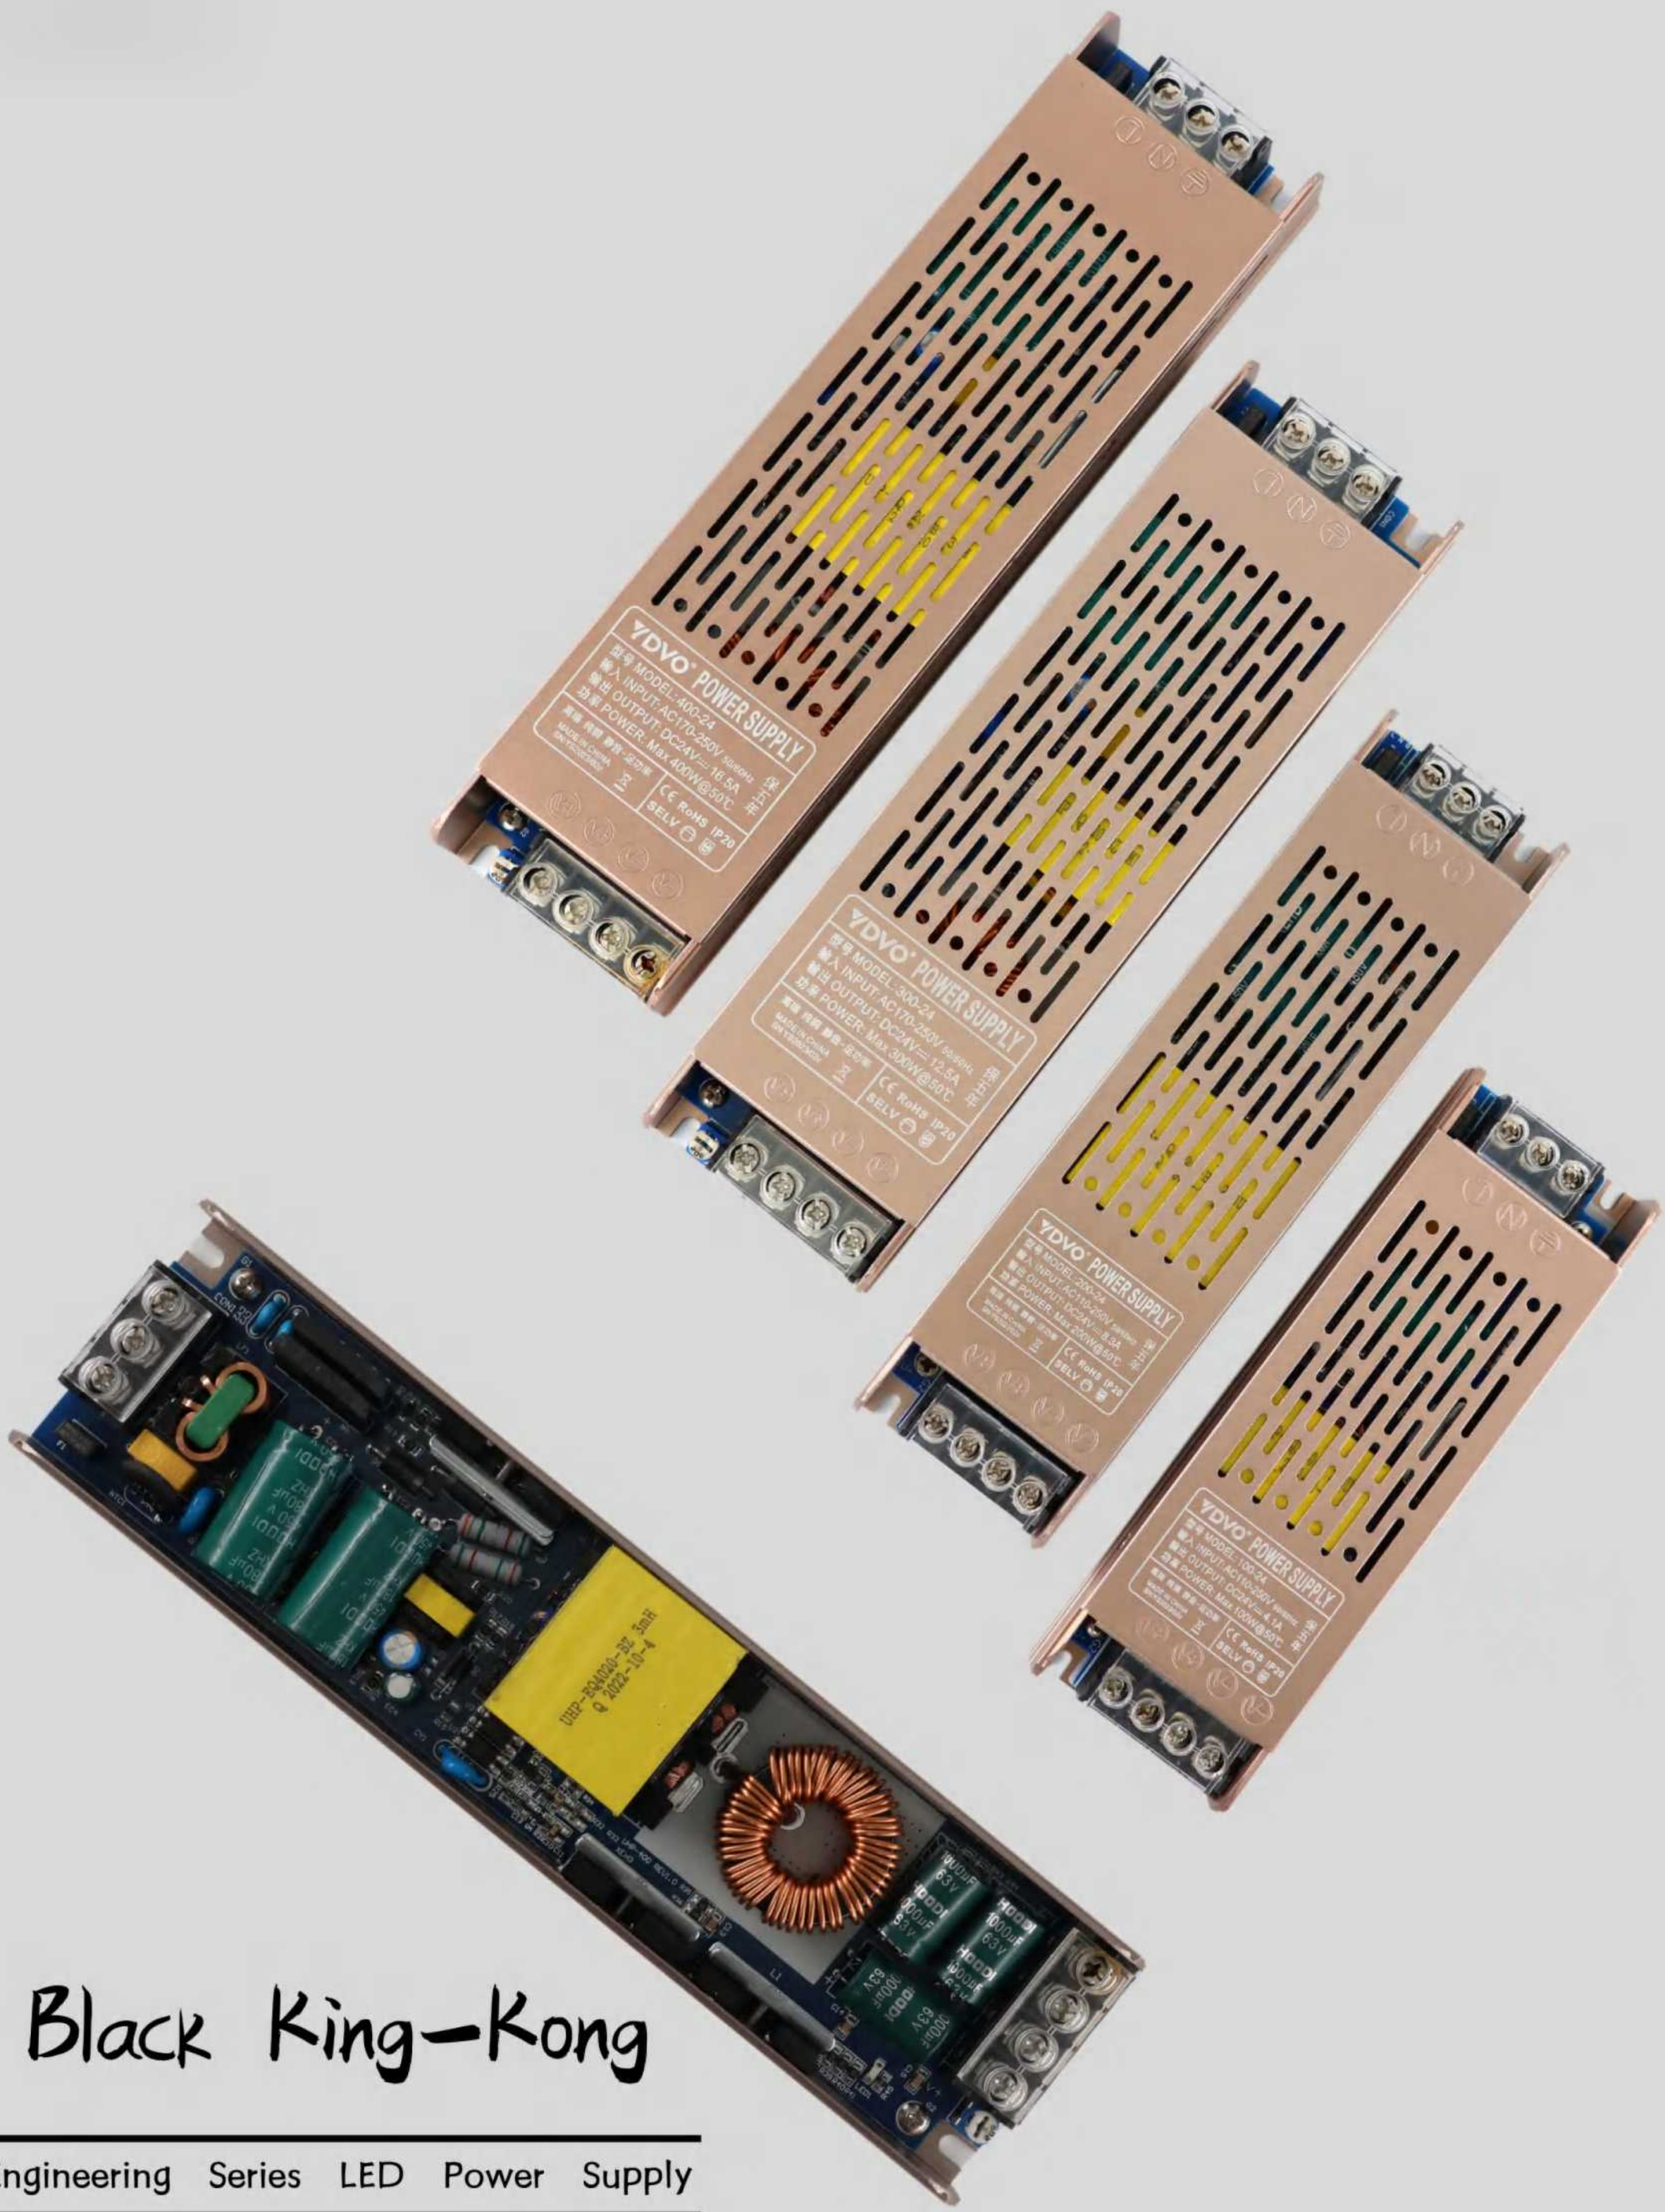

Black King-Kong


Engineering Series LED Power Supply

CE IP20 RoHS SELV


office@guzhenlightingfair.com




AC INPUT	AC 110-250V 50/60Hz
DC OUTPUT	DC 24V ~4.1A
POWER	MAX 100W @50℃
PRODUCT SIZE	L160*W50*H29mm
PRODUCT COLOR	Brown
SAFETY STANDARDS	CCC,CE certified

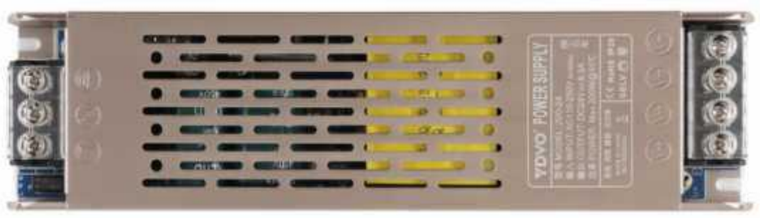

AC INPUT	AC 110-250V 50/60Hz
DC OUTPUT	DC 24V ~8.3A
POWER	MAX 200W @50℃
PRODUCT SIZE	L190*W50*H29mm
PRODUCT COLOR	Brown
SAFETY STANDARDS	CCC,CE certified

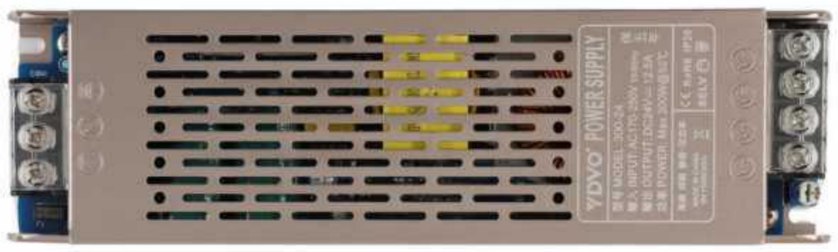

AC INPUT	AC 110-250V 50/60Hz
DC OUTPUT	DC 24V ~12.5A
POWER	MAX 300W @50℃
PRODUCT SIZE	L212*W60*H29mm
PRODUCT COLOR	Brown
SAFETY STANDARDS	CCC,CE certified

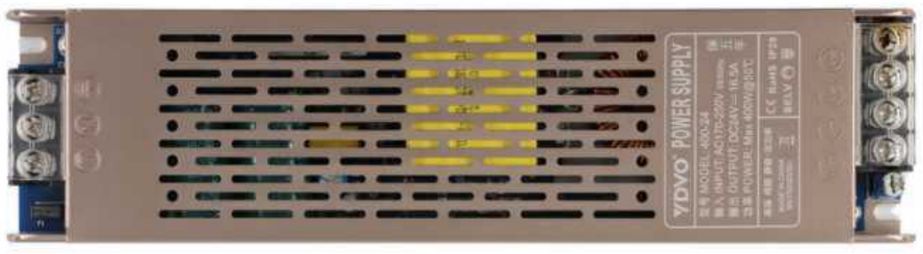

AC INPUT	AC 110-250V 50/60Hz
DC OUTPUT	DC 24V ~16.5A
POWER	MAX 400W @50℃
PRODUCT SIZE	L232*W60*H29mm
PRODUCT COLOR	Brown
SAFETY STANDARDS	CCC,CE certified

office@guzhenlightingfair.com



Milky Way

Half Glue Filling Series LED Power Supply

CE IP20 RoHS SELV

office@guzhenlightingfair.com



AC INPUT	AC 220V 50/60Hz
DC OUTPUT	DC 24V ~2.5A
POWER	MAX 60W
PRODUCT SIZE	L124*W36*H23mm
PRODUCT COLOR	Silver gray(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V 50/60Hz
DC OUTPUT	DC 24V ~4.16A
POWER	MAX 100W
PRODUCT SIZE	141L*W49*H26mm
PRODUCT COLOR	Silver gray(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V 50/60Hz
DC OUTPUT	DC 24V ~8.3A
POWER	MAX 200W
PRODUCT SIZE	L181*W49*H26mm
PRODUCT COLOR	Silver gray(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V 50/60Hz
DC OUTPUT	DC 24V ~12.5A
POWER	MAX 300W
PRODUCT SIZE	L190*W60*H30mm
PRODUCT COLOR	Silver gray(housing)
SAFETY STANDARDS	CCC,CE certified



AC INPUT	AC 220V 50/60Hz
DC OUTPUT	DC 24V ~16.6A
POWER	MAX 400W
PRODUCT SIZE	L223*W60*H30mm
PRODUCT COLOR	Silver gray(housing)
SAFETY STANDARDS	CCC,CE certified